

SELV    RoHS

EM powerLED SELFTEST 4 W

Combined emergency lighting LED Driver

Product description

- Emergency lighting LED Driver with self-test function
- SELV for output voltage < 60 V DC
- Low profile casing (21 x 30 mm cross-section)
- 5-year guarantee

Properties

- Non maintained operation
- Self-test as per IEC 62034
- Constant current mode
- With either screw or clip fastening (clip-fix)
- 1, 2 or 3 h rated duration
- Selectable operating time (jumper)
- Output power limitation
- Two-colour status display LED
- „Rest mode“ function
- Simple set-up
- Automatic restart after LED replacement
- Electronic multi-level charge system
- SELV (outputs powerLED, battery, status LED, test switch)
- Polarity reversal protection for battery
- Deep discharge protection
- Very low energy consumption from the battery after activation of the deep discharge protection
- Short-circuit-proof battery connection
- Emergency lighting LEDs available
- Self-test:
 - Status of the battery
 - Status of the LED
 - Charge condition
 - Function test
 - Duration test

Batteries

- High-temperature cells
- NiCd or NiMH batteries
- 4-year design life
- 1-year guarantee




Standards, page 4


For wiring diagrams and installation examples, page 7 and 8




Screw-fix

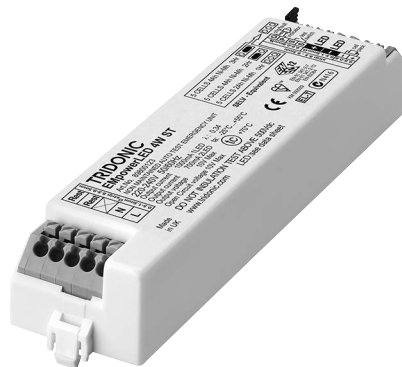

Clip-fix

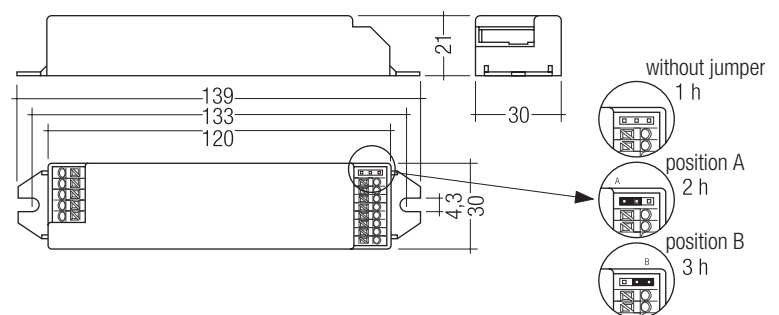

Screw-fix

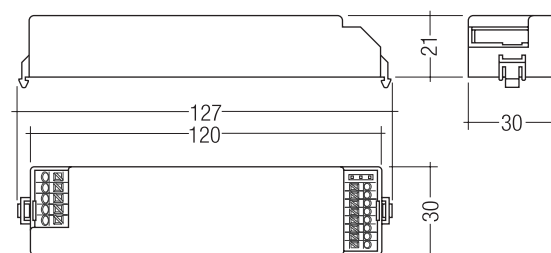

Clip-fix

Technical data

Rated supply voltage	220 – 240 V
Mains frequency	50 / 60 Hz
Typ. λ (at 230 V, 50 Hz)	0.34
Forward voltage range LED module (1 x LED)	2.8 – 3.4 V
Forward voltage range LED module (2 x LED)	5.6 – 6.8 V
LED current in emergency operation (1 x LED)	1.000 mA
LED current in emergency operation (2 x LED)	700 mA
Typ. output power (1 x LED)	3.4 W
Typ. output power (2 x LED)	4.5 W
Time to light	0.23 s from detection of emergency event
Overvoltage protection	320 V (for 1 h)
Battery discharge current	See page 4
Max. casing temperature t_c	70 °C
Ambient temperature t_a	-25 ... +45 °C
Mains voltage changeover threshold	according to EN 60598-2-22
Type of protection	IP20
Rest mode max. number of emergency units	100
Rest mode max. wiring distance	1,000 m
Functional test	Weekly 5s test
Duration test	Yearly 1 h / 2 h / 3 h test

Ordering data

Type	Article number	Packaging, carton	Packaging, pallet	Weight per pc.	Max. number of LED	Power
Screw fastening version						
EM powerLED 4 W ST	89800124	25 pc(s).	600 pc(s).	0.101 kg	2	4 W
EM powerLED 4W ST NiMH	89800445	25 pc(s).	600 pc(s).	0.101 kg	2	4 W
Clip fastening version						
EM powerLED 4 W ST	89800123	25 pc(s).	600 pc(s).	0.101 kg	2	4 W

Specific technical data

Type	Rated duration	Mains current in charging operation			Mains power in charging operation		
		Initial charge	Fast recharge	Trickle charge ^①	Initial charge	Fast recharge	Trickle charge ^①
EM powerLED 4 W ST	1 h	21.0 mA	27.5 mA	15.2 mA	2.0 W	3.0 W	1.2 W
EM powerLED 4 W ST	2 h	27.5 mA	32.4 mA	21.0 mA	3.0 W	3.7 W	2.0 W
EM powerLED 4 W ST	3 h	27.5 mA	32.4 mA	21.0 mA	3.0 W	3.7 W	2.0 W
EM powerLED 4 W ST NiMH	1 h	19.0 mA	24.0 mA	13.0 mA	1.7 W	2.4 W	1.0 W
EM powerLED 4 W ST NiMH	2 h	30.0 mA	32.0 mA	13.0 mA	3.1 W	3.3 W	1.1 W
EM powerLED 4 W ST NiMH	3 h	30.0 mA	32.0 mA	13.0 mA	3.1 W	3.3 W	1.1 W

^① For EM powerLED 4 W ST NiMH: average over 20 min. (4 min. charge / 16 min. off)

ACCES-
SERIES

Test switch EM2

Product description

- For connection to the emergency lighting unit
- For checking the device function



Ordering data

Type	Article number	Packaging, bag	Packaging, carton	Weight per pc.
Test switch EM 2	89805277	25 pc(s).	600 pc(s).	0.011 kg

ACCES-
SERIES

Status indication system OK/fault

Product description

- Two-colour status display LED
- Green: system OK, red: fault



Ordering data

Type	Article number	Packaging, bag	Packaging, carton	Weight per pc.
LED EM bi-colour	89899720	25 pc(s).	200 pc(s).	0.017 kg
LED EM bi-colour, high brightness	89899753	25 pc(s).	800 pc(s).	0.013 kg

Battery selection

EM powerLED 4W BASIC, 1 / 2 / 3 h

				Type	EM powerLED 4W ST		EM powerLED 4W ST NiMH	
				Article no.	89800123 / 89800124		89800445	
				Cells	5 cells		5 cells	
				Duration	1 h	2 / 3 h	1 h	2 / 3 h
Technology and capacity	Design	Number of cells	Type	Article no.	Assignable batteries			
NiCd 4Ah	stick	1 x 5	Accu-NiCd 5A	89895973		•		
D cells [®]	stick + stick	3 + 2	Accu-NiCd 5C 55	89800090		•		
NiMH 2Ah	stick	1 x 5	Accu-NiMH C 5A	89899703	•		•	
Cs cells	side by side	5 x 1	Accu-NiMH C 5B	89899704	•		•	
NiMH 4Ah LA cells	stick + stick	2 + 3	Accu-NiMH 4Ah 5C CON	89800439				•

[®] 50°C batteries also available (see separate datasheet at www.tridonic.com)

Battery charge / discharge data




EM powerLED 4W BASIC, 1 / 2 / 3 h

	Type	EM powerLED 4W ST		EM powerLED 4W ST NiMH	
		Article no.		Article no.	
		Cells		Cells	
		1 h	2 / 3 h	1 h	2 / 3 h
Battery charge time	Initial charge	20 h			
	Fast recharge	10 h	15 h	10 h	15 h
	Trickle charge	continuously			
Charge current	Initial charge	130 mA	250 mA	130 mA	300 mA
	Fast recharge	250 mA	330 mA	210 mA	330 mA
	Trickle charge	60 mA	130 mA	127 mA / 4 min. 0 mA / 16 min.	201 mA / 4 min. 0 mA / 16 min.
Discharge current		1,100 mA	1,100 mA	1,100 mA	1,100 mA

Standards

- according to EN 50172
- according to EN 60598-2-22
- EN 61347-2-7
- EN 61347-2-13
- EN 62384
- EN 62034
- EN 55015
- EN 61000-3-2
- EN 61000-3-3
- EN 61547
- EN 60068-2-64
- EN 60068-2-29
- EN 60068-2-30

Duration link selection

Duration	Link Position
1 hr	 without jumper
2 hr	 position A
3 hr	 position B

Jumper selection

Module supplied with jumper in 3 hours position (position B).

The position of the link will only be read on first power up. If it is changed afterwards both the battery and mains supply must be disconnected for 10 seconds to enable the EM powerLED to read the new link position on reconnection of the battery and mains. It will lead to a false battery failure indication if the link is changed after installation without this reset.

Technical data batteries

Accu-NiCd

Case temperature range
to ensure 4 years design life

4.2 / 4.5 Ah D

Battery voltage/cell

Single cell dimensions

4.2/ 4.5 Ah D

Diameter

Height

Capacity D

Max. short term temperature (reduced life-time)

Max. number discharge cycles

+5 °C to +55 °C

1.2 V

32.5 mm

60.5 mm

4.2 / 4.5 Ah

70 °C

4 cycles per year plus

4 cycles during

commissioning

5 pcs. per carton

Packing quantity

Accu-NiMH

Case temperature range
to ensure 4 years design life

2.0 Ah Cs

4.0 Ah LA

Battery voltage

Single cell dimensions

2.0 Ah Cs

Diameter

Height

4.0 Ah LA

Diameter

Height

Capacity Cs / LA

Max. short term temperature (reduced life-time)

Max. number discharge cycles 2.0 Ah Cs

+5 °C to +55 °C

+5 °C to +50 °C

1.2 V

22 mm

42.5 mm

18.3 mm

90 mm

2.0 Ah / 4.0 Ah

70 °C

4 cycles per year plus

4 cycles during

commissioning

2 cycles per year plus

4 cycles during

commissioning

5 pcs. per carton

Packing quantity

Max. number discharge cycles 4.0 Ah LA

Storage, installation and commissioning

Relevant information about storage conditions, installation and commissioning are provided in the battery datasheets.

Further technical data

The EM powerLED has a unique power regulation circuit; this is designed to limit the total power drawn from the battery in the event of using LED's with a forward voltage (Vf) higher than 3.4 V.

In such cases the unit will reduce the LED current in order to maintain an acceptable drain current from the battery and hence meet the required duration time. This feature enables the EM powerLED to have minimum battery count for a given range of LED's.

Life-time

Average life-time 50,000 hours under rated conditions with a failure rate of less than 10 %. Average failure rate of 0.2 % per 1000 operating hours.

Testing

Functional test

Functional tests are carried out for 5 seconds on a weekly basis under the control of the Micro controller. Initiation and timing of these tests is set during the commissioning of the luminaire.

Duration test

A full duration test is carried out yearly to check the capacity of the batteries.

For a full description of commissioning and test features please refer to application notes.

Commissioning

After installation of the luminaire and initial connection of the mains supply and battery supply to the EM powerLED ST the unit will commence charging the batteries for 20 hours (initial charge). Afterwards the module will conduct a commissioning test for the full duration. The 20 hours recharge occurs also if a new battery is connected or the module exits the rest mode condition.

The following automatic commissioning duration test is only performed when a battery is replaced and fully charged (after 20 hours).

The easy commissioning feature will set the initial test day and time to ensure random testing of units.

Test switch

An optional test switch can be wired to each EM powerLED ST. This can be used to to:

- initiate a 5 seconds function test press 200 ms < T < 1 s
- execute function test as long as switch pressed > 1 s press
- adjust local timing > 10 s press

Rest mode

Rest mode can be initiated by applying a short pulse of between 9.5V_{DC} and 22.5V_{DC} in amplitude for a period of between 150 ms and 1.0s. This should be applied to terminals marked Rest. Terminals are not sensitive to polarity.

A mains reset is required to exit the rest mode.

Isolation and electric strength testing of luminaires

Electronic devices can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to IEC 60598-1 Annex Q (informative only) or ENEC 303-Annex A, each luminaire should be submitted to an isolation test with 500 V_{DC} for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal. The isolation resistance must be at least 2 MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1,500 V_{AC} (or 1,414 x 1,500 V_{DC}). To avoid damage to the electronic devices this test must not be conducted.

Status indication

System status is indicated by a bi-colour LED.

LED Indication	Status	Commentary
Permanent green	System OK	AC mode
Fast flashing green (0.1 s on – 0.1 s off)	Function test underway	
Slow flashing green (1 s on – 1 s off)	Duration test underway	
Red LED on	Load failure	Open circuit / Short circuit / LED failure ^①
Slow flashing red (1 s on – 1 s off)	Battery failure	Battery failed the duration test or function / Battery is defect / Incorrect battery voltage
Fast flashing red (0.1 s on – 0.1 s off)	Charging failure	Incorrect charging current
Double pulsing green	Rest mode	Switching into blocking mode via controller
Green and red off	DC mode	Battery operation (Emergency mode)

① If the EM powerLED is operated in non-maintained mode and an LED fault is detected, the red indicator LED will be illuminated and the output will be stopped. The unswitched mains supply must be switched off before the LED is changed in order that the new LED can be detected. A function or duration test will not reset the fault indication.

Mechanical details

Case manufactured from polycarbonate.

Glow-wire test according to EN 61347-1 with increased temperature of 850 °C passed.

LED bi-colour status indicator

- Green / red
- Mounting hole 6.5 mm dia
- Lead length 1000 mm
- Insulation rating: 90 °C

Test switch

- Mounting hole 7.0 mm dia
- Lead length 550 mm

Battery leads

- Quantity: 1 red and 1 black
- Length: 1 m
- Wire type: 0.5 mm² solid conductor
- Insulation rating: 90 °C

Battery end termination

Push on 4.8 mm receptacle to suit battery spade fitted with insulating cover

Module end termination

8.0 mm stripped insulation

Two-piece batteries are supplied with a 200 mm lead with 4.8 mm receptacles at each end and insulating covers to connect the separate sticks together.


Batteries

Connection method: 4.8 x 0.5 mm spade tag welded to end of cell

For stick packs this connection is accessible after the battery caps have been fitted.

To inhibit inverter operation disconnect the batteries by removing the connector from the battery spade tag.


For battery data see separate data sheet.

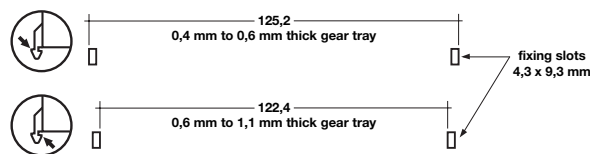Recommended fixing details for clip fixing

Wiring type and cross section


Wiring

mains (SL, N, L)
LED (LED +, LED -)



Wiring

batteries (Bat +, Bat -)
test switch (switch)
status indication LED (status K, A)



Use one wire for each terminal connector only.

Max. lead insulation diameter


Battery 2.1 mm
Test switch 2.1 mm
Indicator LED 2.1 mm

Maximum lead length

LED 3 m
status indication LED 1 m
batteries 1 m

Release of the wiring

Press down the "push button" and remove the cable from front.




Maximum loading of automatic circuit breakers


Automatic circuit breaker type	B10	B13	B16	B20	Inrush current	
Installation Ø	1.5 mm²	1.5 mm²	2.5 mm²	2.5 mm²	I_{max}	Time
EM powerLED 4 W ST	90	130	130	130	10 A	120 µs
EM powerLED 4 W ST NiMH	90	130	130	130	10 A	120 µs

Wiring diagrams

Wiring diagram for one LED or two LED in series

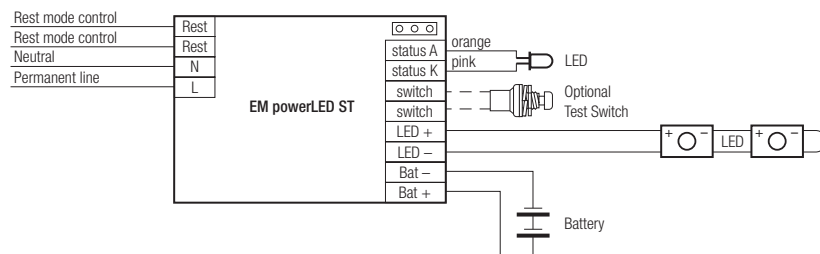

Wiring diagram for multiple LED (3-12) in parallel

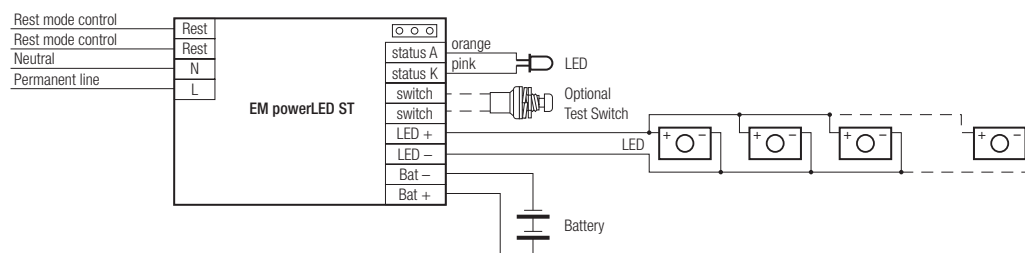

Take care that the LED is connected with the right polarity.

LED that are connected to the EM powerLED PRO EZ-3 devices should have a reverse polarity protection device such as a schottky diodes fitted, otherwise irreversible damage could occur if the LED is connected in reverse polarity. Any protection device must be capable of handling in excess of 1,000 mA.


Note: Please ensure that at the terminal of the EM powerLED module the battery negative is not connected to the negative of the LED load.

Manually tested emergency lighting with combined LED modules for general and emergency lighting (e.g. STARK QLE CLASSIC EM, STARK LLE 24-280-1250 EM, STARK CLE CLASSIC EM, STARK SLE CLASSIC EM):

Due to the fact that independent circuits are used for general and emergency lighting it is important that the normal supply of the mains LED Driver is switched off together with the permanent emergency supply prior to checking the operation of the emergency LEDs.

If this is not done then it may not be possible to see that the emergency LEDs are operating.

Use a circuit similar to that shown next.

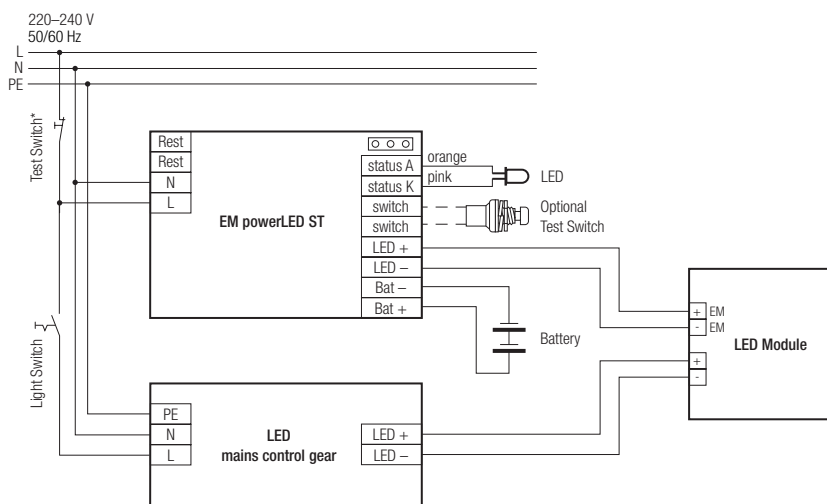

* Use 230 V Test switch

Wiring instructions

- The powerLED terminals, battery, indicator LED and test switch terminals are classified as SELV. Keep the wiring of the DALI and the input terminals separated from the wiring of the SELV terminals or consider special wiring (double insulation, 6 mm creepage and clearance) when these connections should be kept SELV.
- The output to the LED is DC but has high frequency content at 125 kHz, which should be considered for good EMC compliance.
- powerLED leads should be separated from the mains and DALI connections and wiring for good EMC performance. With some luminaires it may be necessary to add a ferrite bead inductor to obtain satisfactory EMC performance.
- Maximum lead length on the powerLED terminals is 3 m. For a good EMC performance keep the LED wiring as short as possible.
- Maximum lead length for the Test switch and Indicator LED connection is 1 m. The test switch and Indicator LED wiring should be separated from the powerLED leads to prevent noise coupling.
- Battery leads are specified with 0.5 mm² cross section and a length of < 1.3 m
- DALI terminals are mains proof.

Additional information

Additional technical information at
www.tridonic.com → Technical Data

Guarantee conditions at
www.tridonic.com → Services

No warranty if device was opened.