

EM converterLED BASIC 50 V

Emergency lighting LED Driver

Product description


- Emergency lighting LED Driver for manual testing
- For LED modules with a forward voltage of 10 – 52 V
- SELV for output voltage < 60 V DC
- Low profile casing (21 x 30 mm cross-section)
- For luminaire installation
- 5-year guarantee

Properties

- Non maintained operation
- 1 or 3 h rated duration
- Operating time selectable with plug (duration link)
- Compatible with all dimmable and non-dimmable constant current LED Driver (see LED Driver compatibility, page 7)
- 3-pole technology: 2-pole LED module changeover and delayed power switching for the LED Driver
- Automatic shutdown of output if LED load is out of range
- Constant power output
- Maximum light output for all LED modules
- Electronic charge system
- Deep discharge protection
- Short-circuit-proof battery connection
- Polarity reversal protection for battery

Batteries

- High-temperature cells
- NiCd or NiMH batteries
- D, Cs or LA cells
- 4-year design life
- 1-year guarantee

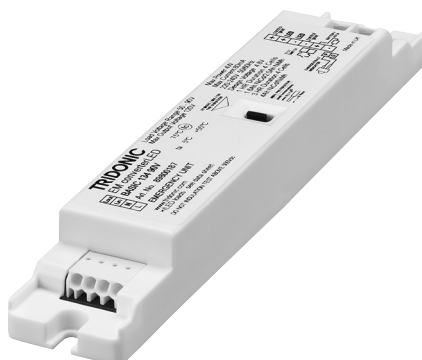


Standards, page 8

Wiring diagrams and installation examples, page 9



EM converterLED BASIC 50 V
Emergency lighting LED Driver

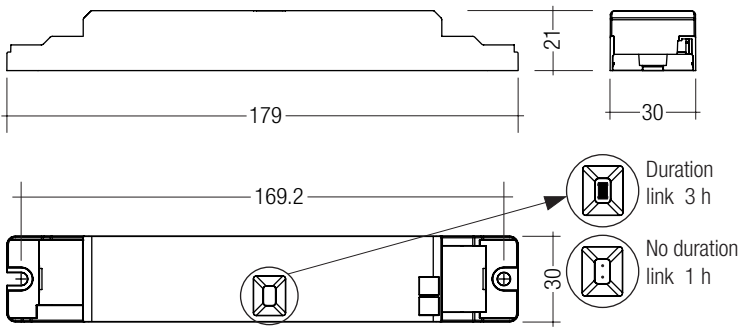

Note: LED Driver supplied with duration link in 3 hours position. Remove duration link for 1 hour duration. Duration link must be set before battery and mains connection.
The EM converterLED BASIC 134 NiCd is supplied without a duration link. The duration is set to 3 hours and cannot be changed.

Technical data

| | |
|------------------------------------|--|
| Rated supply voltage | 220 – 240 V |
| Mains frequency | 50 / 60 Hz |
| Typ. λ (at 230 V, 50 Hz) | 0.6 |
| LED module forward voltage range | 10 – 52 V |
| Output current | see page 4 |
| Time to light | < 0.25 s from detection of emergency event |
| Overvoltage protection | 320 V (for 1 h) |
| Maximum output voltage | 60 V |
| Battery charging time | 20 h ^① |
| Ambient temperature range t_a | -5 ... + 55 °C |
| Max. casing temperature t_c | 70 °C |
| Mains voltage changeover threshold | according to EN 60598-2-22 |
| Type of protection | IP20 |

^① 16 h battery charging time for 2 h emergency lighting function according to AS 2293.

Ordering data

| Type | Article number | Rated duration | Number of cells | Packaging, carton | Packaging, pallet | Weight per pc. |
|------------------------------------|----------------|----------------|-----------------|-------------------|-------------------|----------------|
| EM converterLED BASIC 103 50V | 89800178 | 1/3 h | 3 | 10 pc(s). | 800 pc(s). | 0.077 kg |
| EM converterLED BASIC 104 50V | 89800179 | 1/3 h | 4 | 10 pc(s). | 800 pc(s). | 0.078 kg |
| EM converterLED BASIC 134 NiCd 50V | 89800180 | 3 h | 4 | 10 pc(s). | 800 pc(s). | 0.078 kg |

Specific technical data

| Type | Rated duration | Max. output power | Mains current in charging operation | Rated power in charging operation |
|------------------------------------|----------------|-------------------|-------------------------------------|-----------------------------------|
| EM converterLED BASIC 103 50V | 1 h | 2.75 W | 25 mA | 3.0 W |
| | 3 h | 2.75 W | 30 mA | 3.7 W |
| EM converterLED BASIC 104 50V | 1 h | 3.50 W | 27 mA | 3.0 W |
| | 3 h | 3.50 W | 35 mA | 4.0 W |
| EM converterLED BASIC 134 NiCd 50V | 3 h | 1.35 W | 27 mA | 3.0 W |

RoHS

ACCESSORIES

Test switch EM3

Product description

- For connection to the emergency lighting unit
- For checking the device function
- Plug connection



Ordering data

| Type | Article number | Packaging, bag | Packaging, carton | Weight per pc. |
|------------------|----------------|----------------|-------------------|----------------|
| Test switch EM 3 | 89899956 | 25 pc(s). | 200 pc(s). | 0.013 kg |

ACCESSORIES

Status indication green LED

Product description

- A green LED indicates that charging current is flowing into the battery
- Plug connection



Ordering data

| Type | Article number | Packaging, bag | Packaging, carton | Weight per pc. |
|----------------------------|----------------|----------------|-------------------|----------------|
| LED EM green, 1.0 m CON | 89800269 | 25 pc(s). | 200 pc(s). | 0.015 kg |
| LED EM green, HO 1.0 m CON | 89800271 | 25 pc(s). | 200 pc(s). | 0.015 kg |
| LED EM green, 0.6 m CON | 89800472 | 25 pc(s). | 200 pc(s). | 0.005 kg |
| LED EM green, HO 0.6 m CON | 89800473 | 25 pc(s). | 200 pc(s). | 0.005 kg |
| LED EM green, 0.3 m CON | 89800270 | 25 pc(s). | 200 pc(s). | 0.005 kg |
| LED EM green, HO 0.3 m CON | 89800272 | 25 pc(s). | 200 pc(s). | 0.005 kg |

Battery selection

EM converterLED BASIC, 1 / 3 h

| | | | | Type | EM converterLED BASIC 103 50V | | EM converterLED BASIC 104 50V | | EM converterLED BASIC 134 50V |
|----------------------------------|---------------|-----------------|----------------------|-------------|----------------------------------|-----|----------------------------------|-----|----------------------------------|
| | | | | Article no. | 89800178 | | 89800179 | | 89800180 |
| | | | | Cells | 3 cells | | 4 cells | | 4 cells |
| | | | | Duration | 1 h | 3 h | 1 h | 3 h | 3 h |
| Technology andDesign capacity | | Number of cells | Type | Article no. | Assignable batteries | | | | |
| NiCd 1.6Ah Cs cells | stick | 1 x 3 | Accu-NiCd C 3A | 89899743 | • | | | | |
| | stick | 1 x 4 | Accu-NiCd C 4A | 89899692 | | | • | | • |
| | stick + stick | 2 + 2 | Accu-NiCd C 4C | 89899694 | | | • | | • |
| | side by side | 4 x 1 | Accu-NiCd C 4B | 89899693 | | | • | | • |
| NiCd 4Ah D cells [®] | stick | 1 x 3 | Accu-NiCd 3A | 89895960 | | • | | | |
| | stick | 1 x 4 | Accu-NiCd 4A 55 | 89800089 | | | | • | |
| | side by side | 3 x 1 | Accu-NiCd 3B 55 | 89800384 | | • | | | |
| | side by side | 4 x 1 | Accu-NiCd 4B 55 | 89800385 | | | | • | |
| | stick + stick | 2 + 2 | Accu-NiCd 4C | 89895978 | | | | • | |
| NiMH 2Ah Cs cells | stick | 1 x 3 | Accu-NiMH C 3A | 89899744 | • | | | | |
| | stick | 1 x 4 | Accu-NiMH C 4A | 89899700 | | | • | | • |
| NiMH 4Ah LA cells | stick | 1 x 3 | Accu-NiMH 4Ah 3A CON | 89800441 | | • | | | |
| | stick | 1 x 4 | Accu-NiMH 4Ah 4A CON | 89800442 | | | | • | |
| | stick + stick | 2 + 2 | Accu-NiMH 4Ah 4C CON | 89800438 | | | | • | |

[®] 50 °C batteries also available (see separate datasheet at www.tridonic.com).

Battery charge / discharge data

EM converterLED BASIC, 1 / 3 h

| Type | EM converterLED BASIC 103 50V | | EM converterLED BASIC 104 50V | | EM converterLED BASIC 134 50V |
|-------------------|----------------------------------|--------------|----------------------------------|--------------|----------------------------------|
| Article no. | 89800178 | | 89800179 | | 89800180 |
| Cells | 3 cells | | 4 cells | | 4 cells |
| Duration | 1 h | 3 h | 1 h | 3 h | 3 h |
| Charging current | 105 mA | 210 mA | 105 mA | 210 mA | 105 mA |
| Discharge current | 750 – 960 mA | 750 – 960 mA | 750 – 960 mA | 750 – 960 mA | 290 – 370 mA |

Typ. LED current/voltage characteristics


The LED current in emergency mode is automatically adjusted by the EM converterLED module based on the total forward voltage of the LED modules connected and the associated battery.

EM converterLED BASIC 103 50V

Article number: 89800178

3.6 V battery voltage

750 – 960 mA battery discharge current (tolerance)

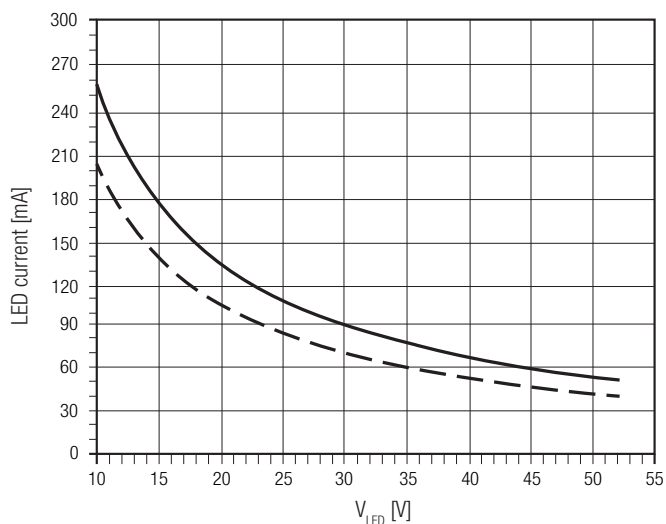


EM converterLED BASIC 104 50V

Article number: 89800179

4.8 V battery voltage

750 – 960 mA battery discharge current (tolerance)

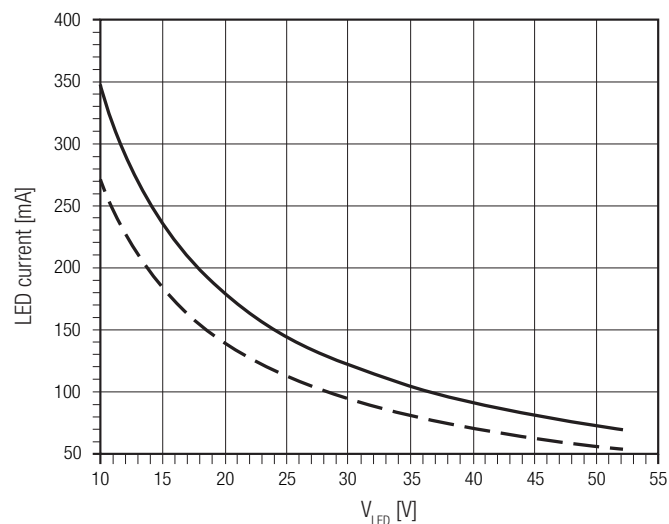

LED peak current at start in emergency mode – 3 cells


| Voltage | Inrush current | Duration |
|---------|----------------|----------|
| 16.0 V | 478 mA | 11.0 ms |
| 18.6 V | 439 mA | 9.6 ms |
| 21.2 V | 407 mA | 8.2 ms |
| 23.7 V | 377 mA | 7.8 ms |
| 26.3 V | 356 mA | 7.0 ms |
| 31.4 V | 315 mA | 6.3 ms |
| 33.9 V | 302 mA | 5.6 ms |
| 36.4 V | 290 mA | 5.2 ms |
| 38.9 V | 275 mA | 4.7 ms |
| 41.5 V | 262 mA | 4.3 ms |
| 44.0 V | 252 mA | 3.9 ms |
| 46.6 V | 244 mA | 3.6 ms |
| 49.0 V | 234 mA | 3.5 ms |
| 51.6 V | 228 mA | 3.3 ms |

LED peak current at start in emergency mode – 4 cells

| Voltage | Inrush current | Duration |
|---------|----------------|----------|
| 16.2 V | 466 mA | 17.0 ms |
| 18.8 V | 435 mA | 13.4 ms |
| 21.3 V | 407 mA | 11.5 ms |
| 23.9 V | 385 mA | 10.8 ms |
| 26.5 V | 365 mA | 9.5 ms |
| 31.6 V | 333 mA | 7.8 ms |
| 34.2 V | 321 mA | 6.5 ms |
| 36.7 V | 308 mA | 6.0 ms |
| 39.3 V | 295 mA | 5.5 ms |
| 41.8 V | 286 mA | 5.3 ms |
| 44.3 V | 277 mA | 5.1 ms |
| 46.9 V | 270 mA | 4.9 ms |
| 49.4 V | 262 mA | 4.4 ms |
| 51.9 V | 255 mA | 4.2 ms |

Note: LED peak current measured at the max. battery discharge current and at a max. battery voltage of 4.5 V (3 cells) or 6 V (4 cells).

EM converterLED BASIC 134 NICD 50V
Article number: 89800180
4.8 V battery voltage
290 – 370 mA battery discharge current (tolerance)

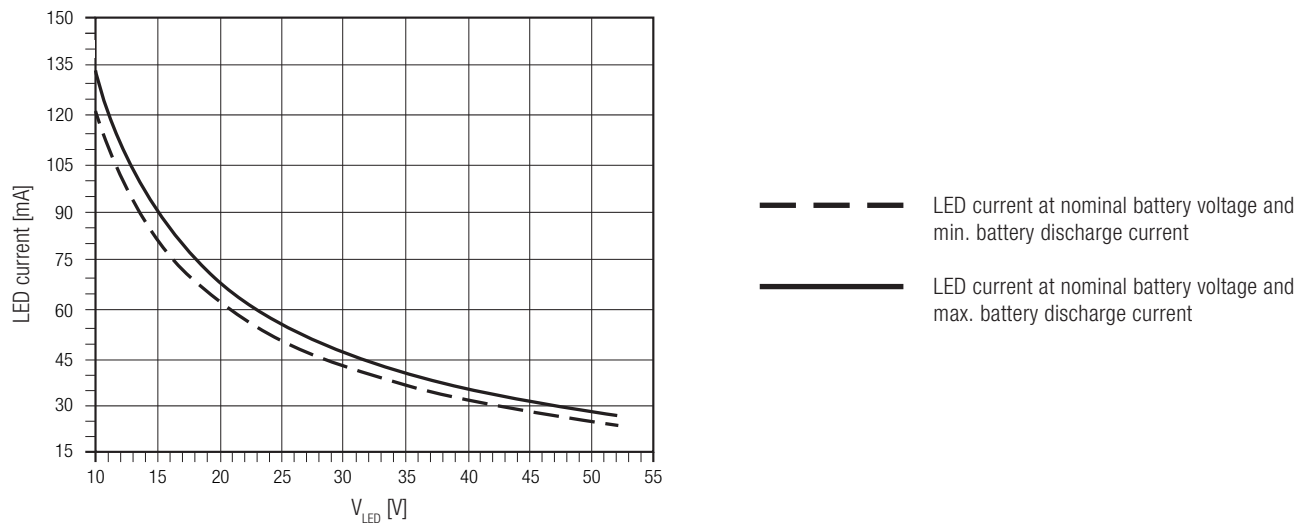

LED peak current at start in emergency mode – 4 cells

| Voltage | Inrush current | Duration |
|---------|----------------|----------|
| 15.8 V | 406 mA | 14.5 ms |
| 18.3 V | 378 mA | 12.5 ms |
| 20.8 V | 359 mA | 10.8 ms |
| 23.4 V | 346 mA | 9.7 ms |
| 25.9 V | 330 mA | 9.0 ms |
| 28.4 V | 316 mA | 8.1 ms |
| 30.9 V | 308 mA | 7.8 ms |
| 33.5 V | 295 mA | 7.0 ms |
| 36.0 V | 287 mA | 6.3 ms |
| 38.5 V | 275 mA | 5.9 ms |
| 41.0 V | 267 mA | 5.7 ms |
| 43.5 V | 258 mA | 5.1 ms |
| 46.0 V | 252 mA | 4.2 ms |
| 48.5 V | 244 mA | 4.0 ms |

Isolation and electric strength testing of luminaires

Electronic LED Drivers can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to IEC 60598-1 Annex Q (informative only) or ENEC 303-Annex A, each luminaire should be submitted to an isolation test with 500 V_{DC} for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal. The isolation resistance must be at least 2 MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1,500 V_{AC} (or 1,414 x 1,500 V_{DC}). To avoid damage to the electronic devices this test **must not be conducted**.

Technical data batteries**Accu-NiCd**

Case temperature range

to ensure 4 years design life

4.2 / 4.5 Ah D

1.6 Cs

Battery voltage/cell

Single cell dimensions

4.2/ 4.5 Ah D

Diameter

Height

1.6 Ah Cs

Diameter

Height

Capacity D

Capacity Cs

Max. short term temperature (reduced life-time)

Max. number discharge cycles

+5 °C to +55 °C

+5 °C to +50 °C

1.2 V

32.5 mm

60.5 mm

22.5 mm

42.5 mm

4.2 / 4.5 Ah

1.6 Ah

70 °C

4 cycles per year plus

4 cycles during

commissioning

5 pcs. per carton

Packing quantity

Accu-NiMH

Case temperature range

to ensure 4 years design life

2.0 Ah Cs

4.0 Ah LA

Battery voltage

Single cell dimensions

2.0 Ah Cs

Diameter

Height

4.0 Ah LA

Diameter

Height

Capacity Cs / LA

Max. short term temperature (reduced life-time)

Max. number discharge cycles 2.0 Ah Cs

+5 °C to +55 °C

+5 °C to +40 °C

1.2 V

22 mm

42.5 mm

18.3 mm

90 mm

2.0 Ah / 4.0 Ah

70 °C

4 cycles per year plus

4 cycles during

commissioning

2 cycles per year plus

4 cycles during

commissioning

5 pcs. per carton

Max. number discharge cycles 4.0 Ah LA

Packing quantity

Storage, installation and commissioning

Relevant information about storage conditions, installation and commissioning are provided in the battery datasheets.

LED Driver compatibility

The EM converterLED emergency unit use 3 pole technology and is compatible with most LED Drivers on the market, however it is important to check that the rating of the LED Driver does not exceed the values specified below:

- The max. allowed output current rating of the associated LED Driver is 2.4 A peak (current rating of switching relays of EM converterLED)
- The max. allowed inrush current rating of the associated LED Driver is 60 A peak for 1 ms (inrush current rating of switching relay of EM converterLED)
- The max. allowed output voltage of the associated LED Driver applied to the EM converterLED output is 450V (voltage withstand between adjacent contact of the single switching relay of the EM converterLED)
- The max. allowed LED load of the associated LED Driver is 150 W in operation. The load must be an LED module.

Life-time

Average life-time 50,000 hours under rated conditions with a failure rate of less than 10 %. Average failure rate of 0.2 % per 1000 operating hours.

Maximum lead length

LED 3 m[®]

Status indication LED 1 m

Batteries 1.3 m

[®] Note: The length of LED leads to the LED module must not be exceeded. Note that the length of the EM converterLED leads is added to the length of the leads from the LED Driver to the EM converterLED module when considering max. permitted lead length of the LED Driver. Leads should always be kept as short as possible.

Mechanical details

Casing manufactured from polycarbonate.

Glow-wire test according to EN 61347-1 with increased temperature of 960 °C passed.

LED status indicator

- Green
- Mounting hole 6.5 mm dia
- Lead length 0.3 m / 1.0 m
- Insulation rating: 90 °C
- Plug connection

Test switch

- Mounting hole 7.0 mm dia
- Lead length 0.55 m
- Plug connection

Battery leads

- Quantity: 1 red and 1 black
- Length: 1.3 m
- Wire type: 0.5 mm² solid conductor
- Insulation rating: 90 °C

Battery end termination

Push on 4.8 mm receptacle to suit battery spade fitted with insulating cover

Module end termination


8.0 mm stripped insulation

Two-piece batteries are supplied with a 200 mm lead with 4.8 mm receptacle at each end and insulating covers to connect the separate sticks together.

Electrical connections

Wiring

LED module/LED Driver/supply

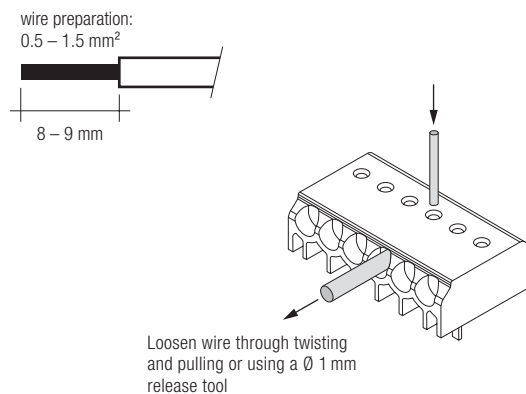

Wiring type and cross section

Solid wire with a cross section of 0.5 – 1.5 mm². Strip 8 – 9 mm of insulation from the cables to ensure perfect operation of terminals.

Batteries

Connection method: 4.8 x 0.5 mm spade tag welded to end of cell.

For stick packs this connection is accessible after the battery caps have been fitted.

To inhibit inverter operation disconnect the batteries by removing the connector from the battery spade tag.

For battery data see separate data sheet.

Phase to phase isolation

The use of different phases for switched line and unswitched line is permitted.



Standards

- according to EN 50172
- according to EN 60598-2-22
- EN 61347-1:2008+A2:2013
- EN 61347-2-13
- EN 61347-2-7
- EN 55015
- EN 61000-3-2
- EN 61000-3-3
- EN 61547
- EN 60068-2-64
- EN 60068-2-29
- EN 60068-2-30
- EN 62384

Meaning of marking

Double or reinforced insulation for built-in electronic LED Drivers

Duration link selection

| Duration | Usage duration link |
|----------|--|
| 3 h |  With link |
| 1 h |  Without link |

Emergency lighting LED Driver supplied with duration link in 3 hours position.

The position of the link will only be read on first power up. If it is changed afterwards both the battery and mains supply must be disconnected for 10 seconds to enable the EM converterLED to read the new link position on reconnection of the battery and mains. It will lead to a false battery failure indication if the link is changed after installation without this reset.

Wiring guidelines

- The LED terminals, battery, indicator LED and test switch terminals are classified as SELV (output voltage < 60 V DC). Keep the wiring of the input terminals separated from the wiring of the SELV equivalent terminals or consider special wiring (double insulation, 6 mm creepage and clearance) when these connections should be kept SELV.
- The output to the LED is DC but has high frequency content, which should be considered for good EMC compliance.
- LED leads should be separated from the mains connections and wiring for good EMC performance.
- Maximum lead length on the LED terminals is 3 m. For a good EMC performance keep the LED wiring as short as possible.
- Maximum lead length for the Test switch and Indicator LED connection is 1 m. The test switch and Indicator LED wiring should be separated from the LED leads to prevent noise coupling.
- Battery leads are specified with 0.5 mm cross section and a length of 1.3 m

To ensure that a luminaire containing LED emergency units complies with EN 55015 for radio frequency conducted interference in both normal and emergency mode it is essential to follow good practice in the wiring layout.

Within the luminaire the switched and unswitched 50 Hz supply wiring must be routed as short as possible and be kept as far away as possible from the LED leads. Through wiring may affect the emc performance of the luminaire.

The length of LED leads must not be exceeded. Note that the length of the EM converterLED leads is added to the length of the leads from the LED Driver to the EM converterLED module when considering max. permitted lead length of the LED Driver.

Maximum loading of automatic circuit breakers

| Automatic circuit breaker type | B10 | B13 | B16 | B20 | C10 | C13 | C16 | C20 | Inrush current | |
|--------------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|------------------|--------|
| Installation Ø | 1.5 mm ² | 1.5 mm ² | 1.5 mm ² | 2.5 mm ² | 1.5 mm ² | 1.5 mm ² | 1.5 mm ² | 2.5 mm ² | I _{max} | time |
| EM converterLED 103 BASIC 50V | 90 | 130 | 130 | 130 | 180 | 260 | 260 | 260 | 10 A | 120 µs |
| EM converterLED 104 BASIC 50V | 90 | 130 | 130 | 130 | 180 | 260 | 260 | 260 | 10 A | 120 µs |


Wiring diagrams

One or more LED modules with a total forward voltage of 10 to 52 V can be connected to the EM converterLED 50V module. These LED module(s), marked with "Emergency" are operated in emergency mode from the associated battery. In normal mains mode all LED modules are operated by the mains LED Driver.


Use of the test switch:

For checking the device function press the test switch for a minimum of 3 seconds.


EM converterLED BASIC with one LED module for non-maintained emergency operation

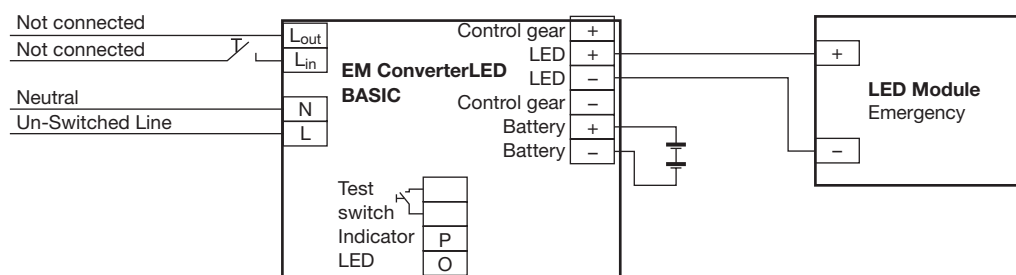

EM converterLED BASIC with a standard LED Driver and one LED module for mains and emergency operation

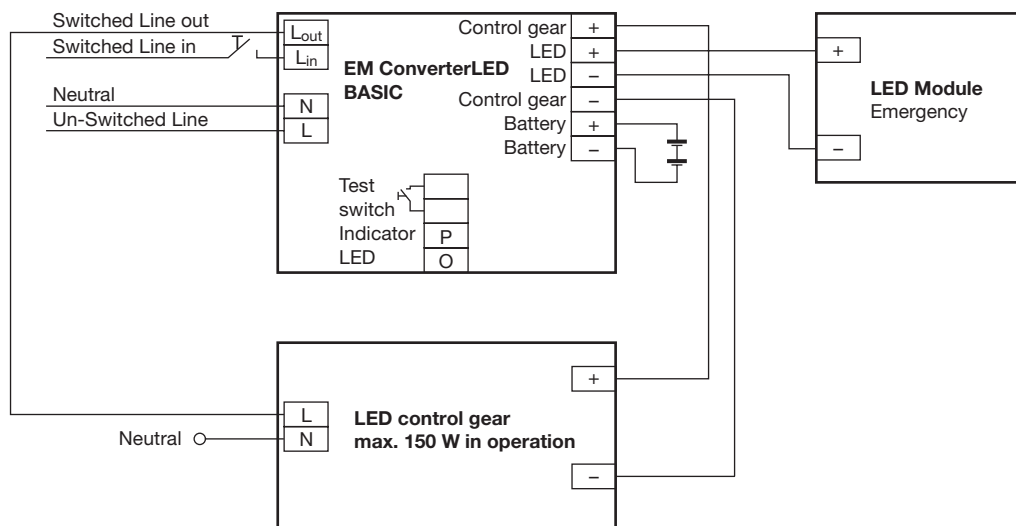


EM converterLED BASIC with a standard LED Driver and series operation of LED modules

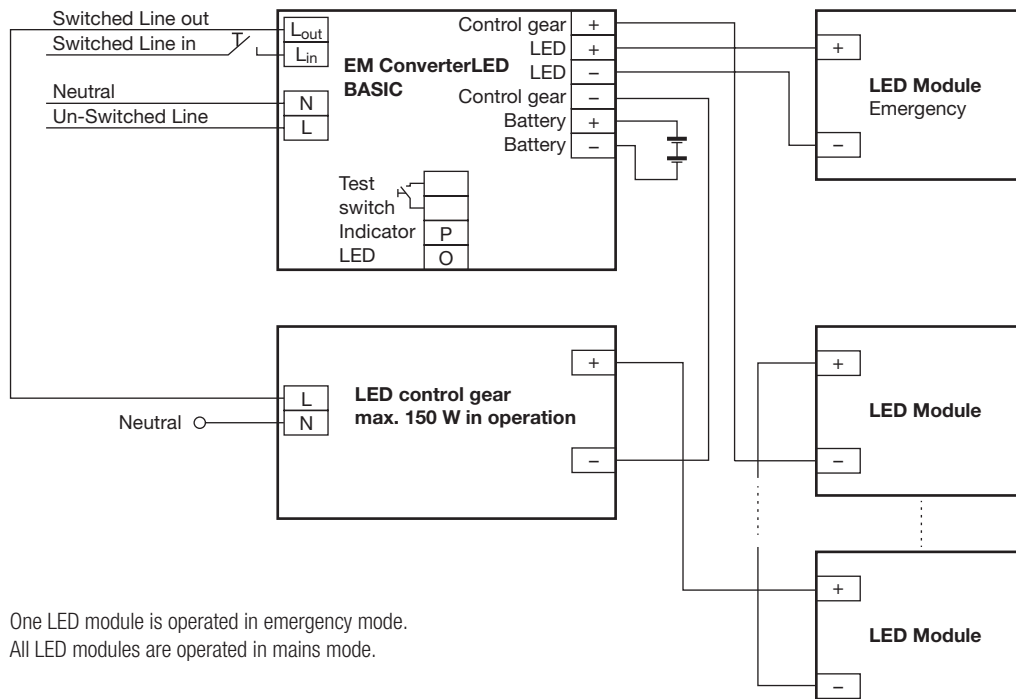


One LED module is operated in emergency mode.
All LED modules are operated in mains mode.

EM converterLED BASIC with a standard LED Driver and series operation of LED modules

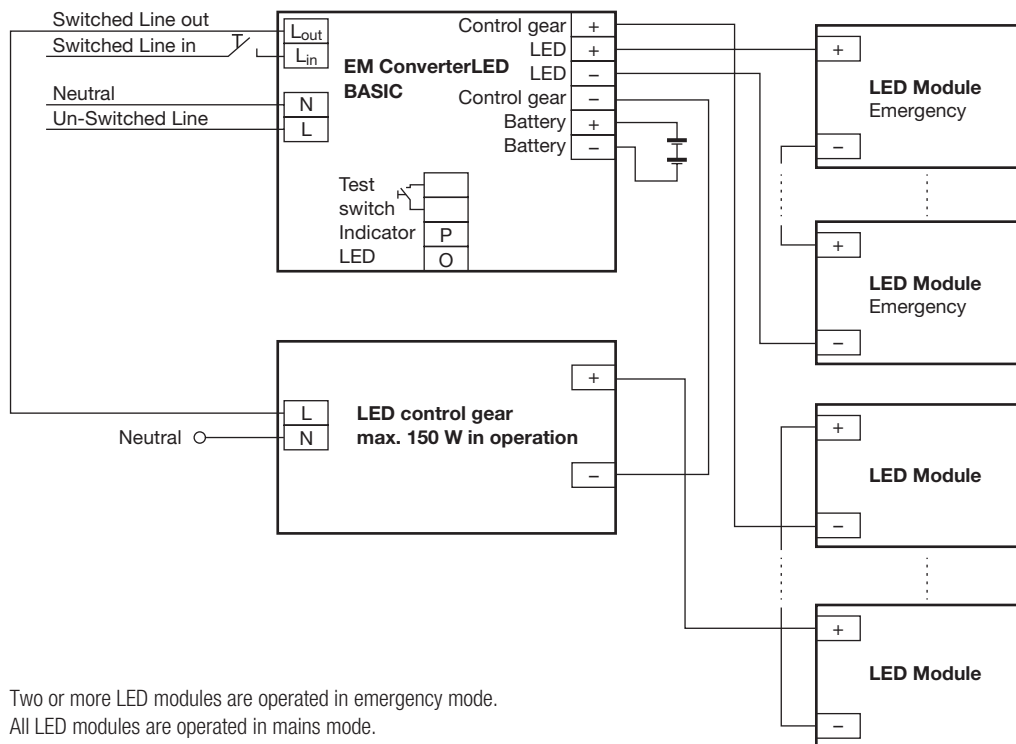


Two or more LED modules are operated in emergency mode.
All LED modules are operated in mains mode.

EM converterLED BASIC with a standard LED Driver and parallel operation of LED modules

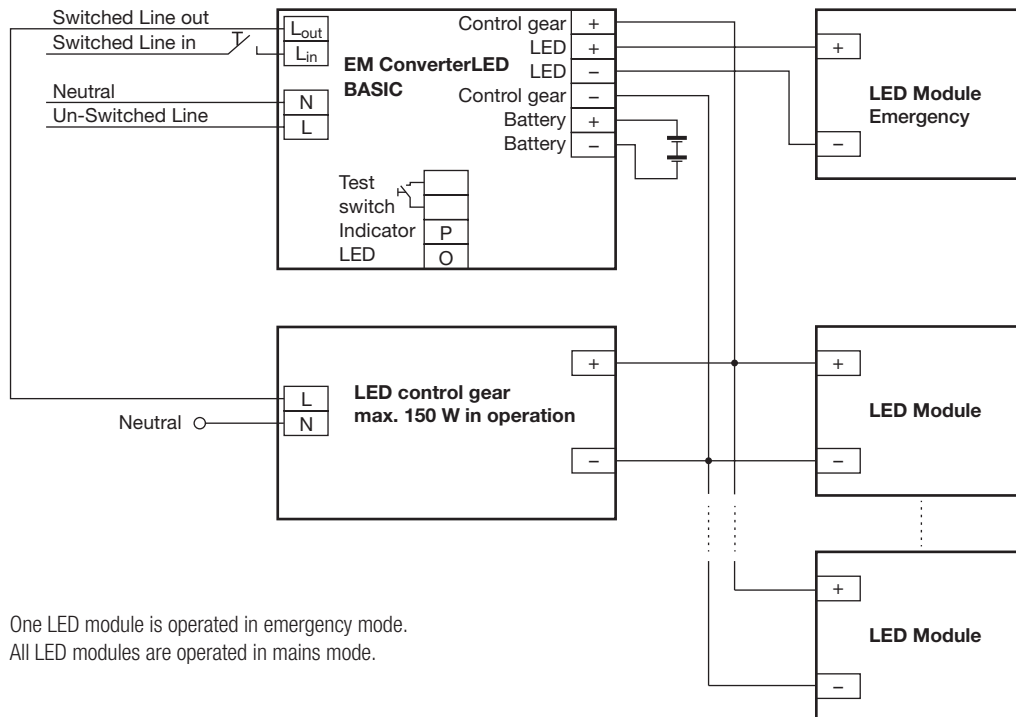

One LED module is operated in emergency mode.
All LED modules are operated in mains mode.

EM converterLED BASIC with a standard LED Driver and parallel operation of LED modules

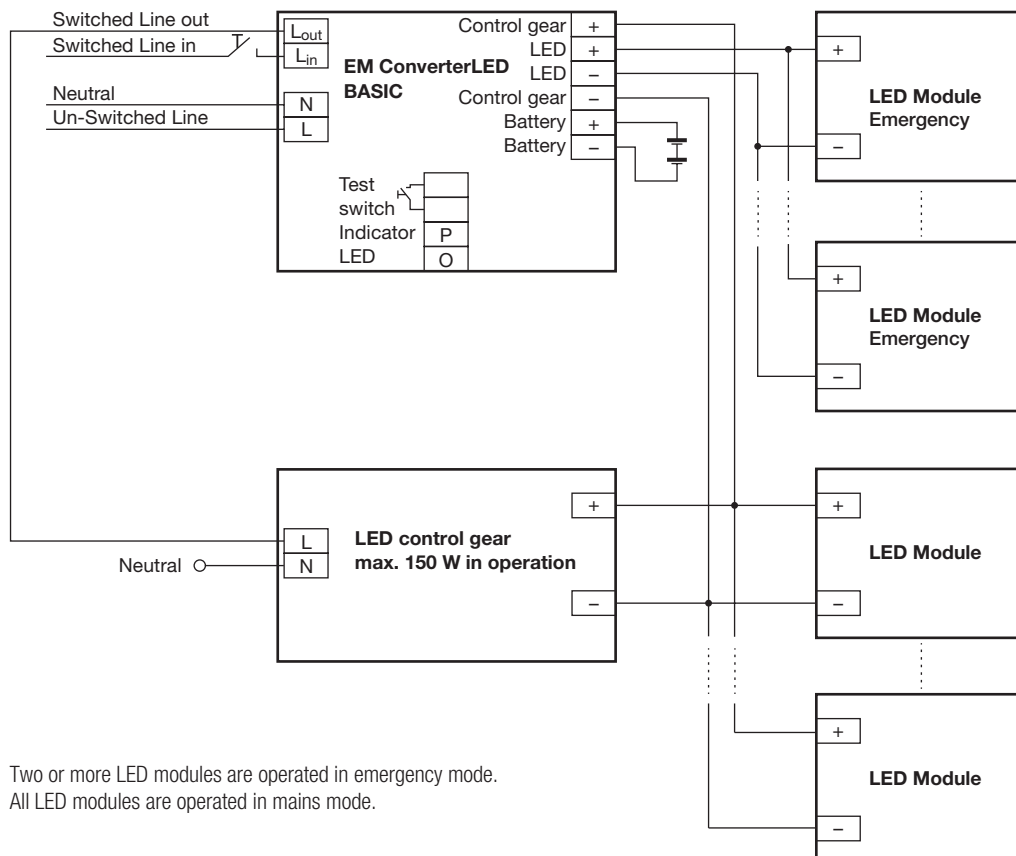

Two or more LED modules are operated in emergency mode.
All LED modules are operated in mains mode.

Additional information

Additional technical information at www.tridonic.com → Technical Data

Guarantee conditions at www.tridonic.com → Services

Life-time declarations are informative and represent no warranty claim.
No warranty if device was opened.