

TALEXdriver LC 25/30W 600/700mA fixC SC SNC
ESSENCE series

Product description

- Fixed output LED Driver
- Can be either used build-in or independent with clip-on strain-relief (see accessory)
- Constant current LED Driver
- Output current 600 or 700 mA
- Max. output power 26 or 30 W
- Nominal life-time up to 50,000 h
- For luminaires of protection class I and protection class II
- Temperature protection as per EN 61347-2-13 C5e
- Independent LED Driver with cable clamps
- 5-year guarantee

Properties

- Casing: polycarbonat, white
- Type of protection IP20


Functions

- Overload protection
- Short-circuit protection
- No-load protection
- Burst protection voltage 1 kV
- Surge protection voltage 1 kV (L to N)
- Surge protection voltage 2 kV (L/N to earth)



Standards, page 3

Wiring diagrams and installation examples, page 4

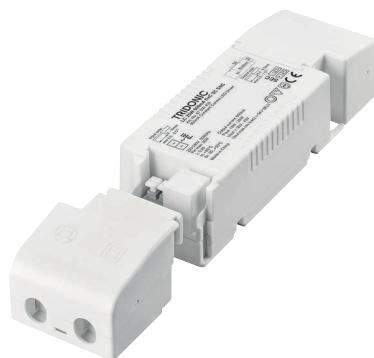

With strain-relief



IP20 SELV                                                



ACCESSORIES

Strain-relief set 43x30mm

Product description

- Optional strain-relief set for independent applications
- Transforms the LED Driver into a fully class II compatible LED Driver (e.g. ceiling installation)
- Easy and tool-free mounting to the LED Driver, screwless cable-clamp channels for long strain-relief (30 x 43 x 30 mm)
- With screws for short strain-relief (15 x 43 x 30 mm)
- Overall length = length L (LED Driver) + 2 x 30 mm (long strain-relief set), 2 x 15 mm (short strain-relief) or long and short strain-relief any combination
- Standard SC (L = 30 mm) available as non-pre-assembled and pre-assembled
- Short SC (L = 15 mm) only pre-assembled available



ACU SC 30x43x30mm CLIP-ON SR SET
(28001168, non-pre-assembled)


ACU SC 30x43x30mm CLIP-ON SR SET 300
(28001351, non-pre-assembled, 300 pcs. packaging)





ACU SC 30x43x30mm CLIP-ON SR PA
(28001699, pre-assembled)




ACU SC 15x43x30mm CLIP-ON SR PA
(28001574, pre-assembled)

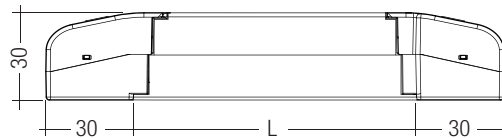

ACU SC 30x43x30mm CLIP-ON SR SET / PA

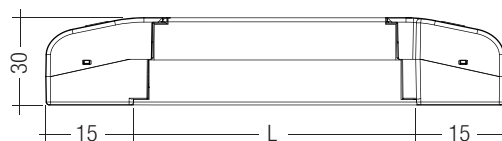

ACU SC 15x43x30mm CLIP-ON SR PA



Ordering data

Type	Article number	Packaging carton [®]	Packaging outer box	Weight per pc.
ACU SC 43x30mm CLIP-ON SR SET	28001168	10 pc(s).	500 pc(s).	0.021 kg
ACU SC 43x30mm CLIP-ON SR SET 300	28001351	300 pc(s).	300 pc(s).	0.021 kg
ACU SC 30x43x30mm CLIP-ON SR PA	28001699	10 pc(s).	500 pc(s).	0.021 kg
ACU SC 15x43x30mm CLIP-ON SR PA	28001574	10 pc(s).	1,200 pc(s).	0.010 kg

[®] 28001168: A carton of 10 pcs. is equal to 10 sets, each with 2 strain-reliefs parts.
28001351: A carton of 300 pcs. is equal to 300 sets, each with 2 strain-reliefs parts.
28001699 + 28001574: A carton contains exactly 10 pcs. strain-reliefs (no sets).

Standards

EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-13
EN 61547

Overload protection

If the output voltage range is exceeded the LED control gear will protect itself and LED may flicker. After elimination of the overload, the nominal operation is restored automatically.

Short-circuit behaviour

In case of a short circuit on the secondary side (LED) the LED control gear switches into hic-cup mode. After elimination of the short-circuit fault the LED control gear will recover automatically.

No-load operation

The LED control gear works in burst working mode to provide a constant output voltage regulation which allows the application to be able to work safely when LED string opens due to a failure.

Installation instructions

The LED module and all contact points within the wiring must be sufficiently insulated against 3 kV surge voltage.
Air and creepage distance must be maintained.

Replace LED module

1. Mains off
2. Remove LED module
3. Wait for 10 seconds
4. Connect LED module again

Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.

Expected life-time

Type	ta	40 °C	50 °C
LC 25W 600mA fixC SC SNC	tc	75 °C ^①	85 °C ^①
	Life-time	50,000 h	30,000 h
LC 30W 700mA fixC SC SNC	tc	80 °C ^①	90 °C ^①
	Life-time	50,000 h	30,000 h

^① Test result at max. output voltage.

The LED Drivers are designed for a life-time stated above under reference conditions and with a failure probability of less than 10 %.

Glow-wire test

according to EN 61347-1 with increased temperature of 960 °C passed.

Mounting of device

Max. torque for fixing: 0.5 Nm/M4

Storage conditions

Humidity: 5 % up to max. 85 %,
not condensed
(max. 56 days/year at 85 %)

Storage temperature: -40 °C up to max. +80 °C

The devices have to be within the specified temperature range (ta) before they can be operated.


Maximum loading of automatic circuit breakers

Automatic circuit breaker type	C10	C13	C16	C20	B10	B13	B16	B20	Inrush current
Installation Ø	1.5 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²	1.5 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²	<i>I</i> _{max} Time
LC 25W 600mA fixC SC SNC	50	65	80	100	40	52	64	80	8 A 100 µs
LC 30W 700mA fixC SC SNC	45	60	75	90	36	48	60	72	8 A 100 µs

Harmonic distortion in the mains supply (at 230 V/50 Hz and full load) in %

	THD	3.	5.	7.	9.	11.
LC 25W 600mA fixC SC SNC	< 20	< 12	< 4	< 3	< 3	< 2
LC 30W 700mA fixC SC SNC	< 20	< 12	< 4	< 2	< 2	< 2

Wiring diagram

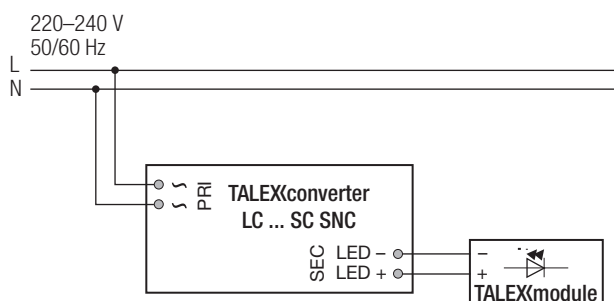

Isolation and electric strength testing of luminaires

Electronic devices can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to IEC 60598-1 Annex Q (informative only!) or ENEC 303-Annex A, each luminaire should be submitted to an isolation test with 500 V_{DC} for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal.
The isolation resistance must be at least 2 MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1500 V_{AC} (or 1.414 x 1500 V_{DC}). To avoid damage to the electronic devices this test must not be conducted.

Additional information

Additional technical information at
www.tridonic.com → Technical Data

Guarantee conditions at
www.tridonic.com → Services

No warranty if device was opened.

Wiring type and cross section

The input wiring can be stranded wires with ferrules with a cross section of 0.5 – 1.5 mm² or with solid wires with a cross section of 0.5 – 2.5 mm². Strip 9 – 10 mm of insulation from the cables to ensure perfect operation of the push-wire terminals.

The output wiring can be done with a cross section of 0.5 – 1.5 mm². Strip 8.5 – 9.5 mm of insulation from the cables to ensure perfect operation of the push-wire terminals.

Input wiring

wire preparation:
Solid: 0.5 – 2.5 mm²
Fine-stranded: 0.5 – 1.5 mm²

Output wiring

wire preparation:
0.5 – 1.5 mm²


Wiring guidelines

- All connections must be kept as short as possible to ensure good EMI behaviour.
- Mains leads should be kept apart from LED control gear and other leads (ideally 5 – 10 cm distance)
- Max. length of output wires is 2 m.
- Secondary switching is not permitted.
- Incorrect wiring can damage LED modules.
- Through wiring of mains is connecting additional LED Driver only. Max. permanent current of 10 A may not be exceeded.
- The wiring must be protected against short circuits to earth (sharp edged metal parts, metal cable clips, louver, etc.).


Release of the wiring

Press down the "push button" and remove the cable from front.

Input terminal




Output terminal




Diagrams LC 25W 600mA fixC SC SNC


Efficiency vs load

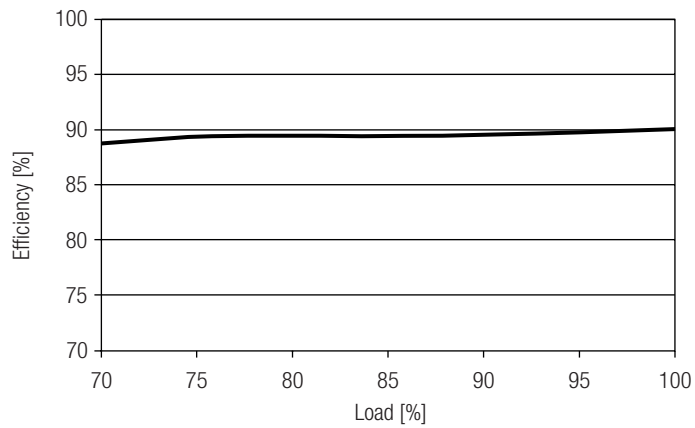


Power factor vs load

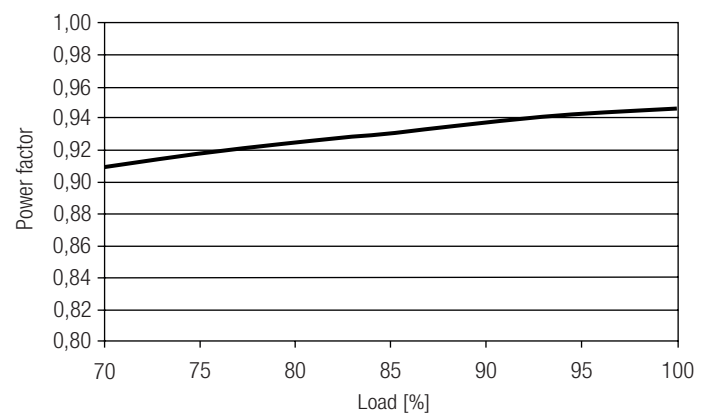


Input power vs load

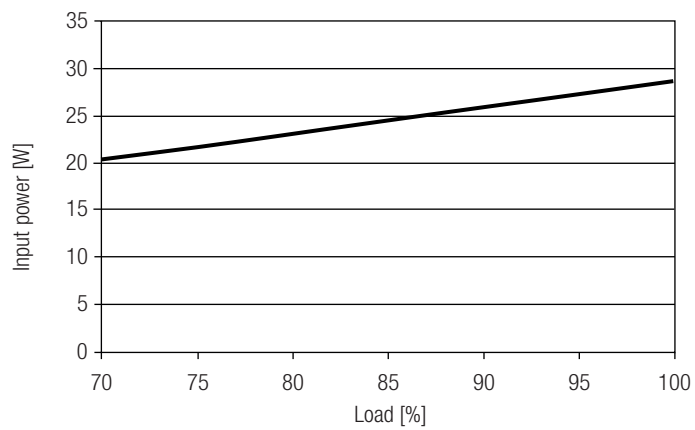

Input current vs load

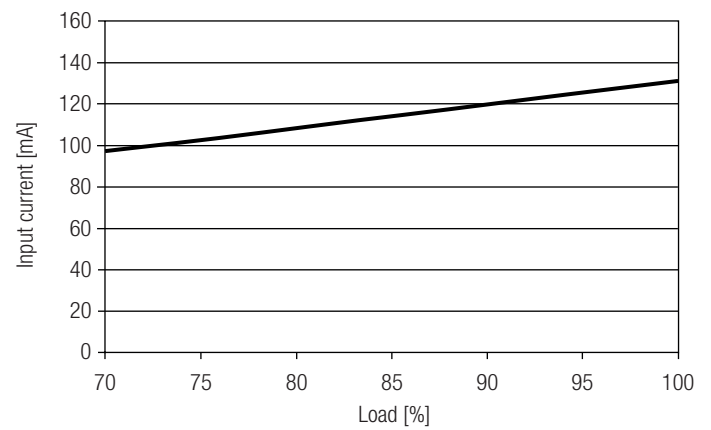


THD vs load

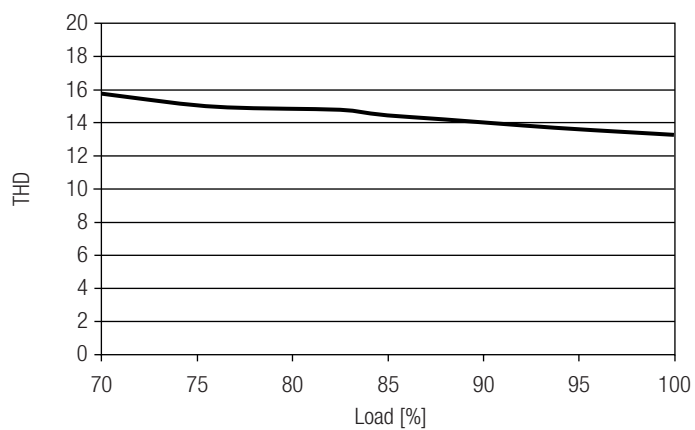


Diagrams LC 30W 700mA fixC SC SNC


Efficiency vs load

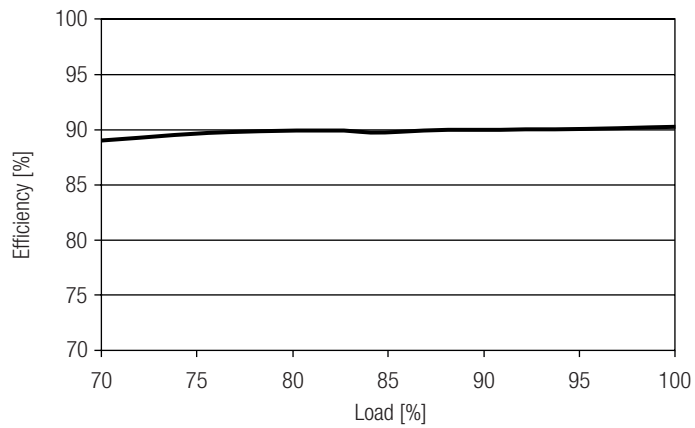


Power factor vs load

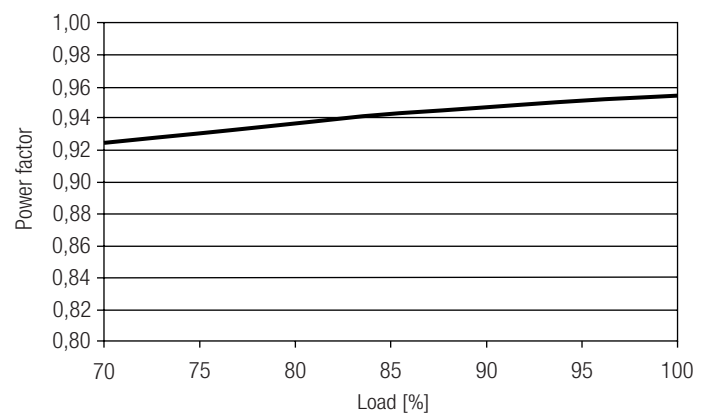

Input power vs load

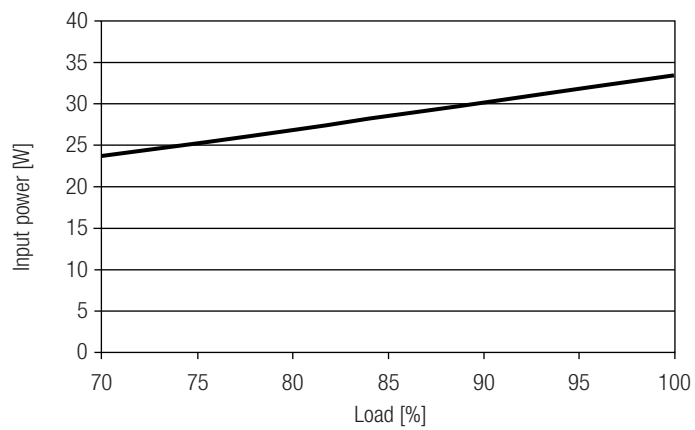

Input current vs load

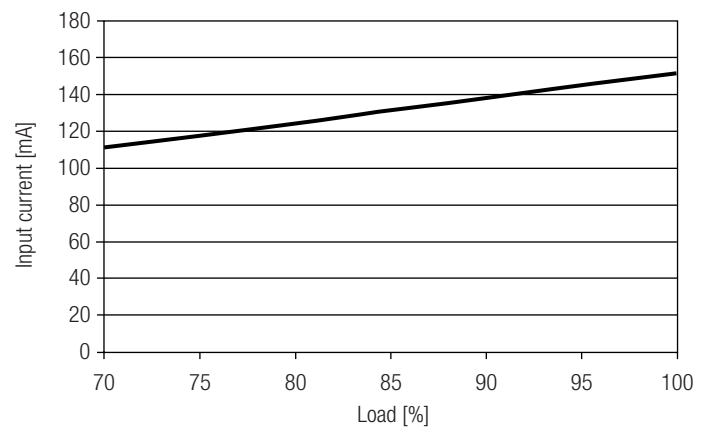

THD vs load

