



Module STARK CLE 120-2000 CLASSIC / CLE 130-2500 CLASSIC

Module CLE

Product description

- Designed for diffuser downlights and wallmounted luminaires
- Ideal to realise simple luminaire designs
- For easy adaptation to existing luminaire architecture
- Luminaire body can act as heat sink
- Efficacy of the module up to 115 lm/W
- High colour rendering index CRI > 80
- Small colour tolerance MacAdam 3[®]
- Colour temperatures 3,000 and 4,000 K
- Long life-time: 50,000 hours, 5-year guarantee



Standards, page 3

For colour temperatures and tolerances, page 6



CLE 120



CLE 130



Typical application

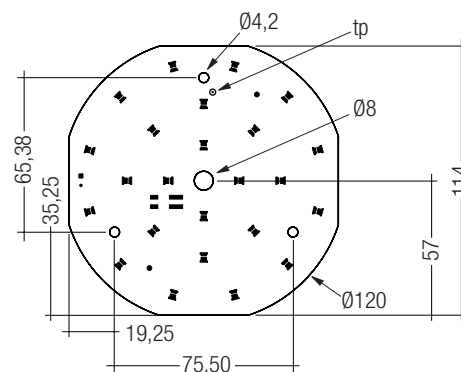


Module STARK CLE 120-2000 CLASSIC / CLE 130-2500 CLASSIC

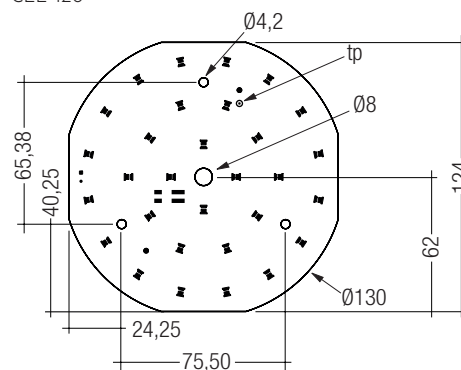
Module CLE

Technical data

Beam characteristic	120°
Ambient temperature t_a	-25 ... +45 °C
Typ. tp point	65 °C
Risk group (EN 62471:2008)	1
Type of protection	IP00



CLE 120



CLE 130

Ordering data

Type	Article number	Colour temperature	Packaging, carton	Weight per pc.
STARK-CLE-120-2000-830-CLA	89600431	3,000 K	20 pc(s).	0.031 kg
STARK-CLE-120-2000-840-CLA	89600432	4,000 K	20 pc(s).	0.032 kg
STARK-CLE-130-2500-830-CLA	89601924	3,000 K	15 pc(s).	0.037 kg
STARK-CLE-130-2500-840-CLA	89601925	4,000 K	15 pc(s).	0.036 kg

Specific technical data

Type	Photo-metric code	Typ. luminous flux at $t_p = 25\text{ °C}^{①}$	Typ. luminous flux at $t_p = 65\text{ °C}^{①}$	Typ. forward current ^② ③	Min. forward voltage at $t_p = 65\text{ °C}$	Max. forward voltage at $t_p = 25\text{ °C}$	Typ. power consumption at $t_p = 65\text{ °C}^{①}$	Luminous efficacy module at $t_p 25\text{ °C}$	Luminous efficacy module at $t_p 65\text{ °C}$	Luminous efficacy system at $t_p 65\text{ °C}$	Colour rendering index CRI	Energy classification
Operating mode at 700 mA												
STARK-CLE-120-2000-830-CLA	830/349	2,080 lm	1,980 lm	700 mA	21.5 V	29.0 V	17.7 W	115 lm/W	112 lm/W	95 lm/W	> 80	A+
STARK-CLE-120-2000-840-CLA	840/349	2,080 lm	1,980 lm	700 mA	21.5 V	29.0 V	17.7 W	115 lm/W	112 lm/W	95 lm/W	> 80	A+
STARK-CLE-130-2500-830-CLA	830/349	2,600 lm	2,480 lm	700 mA	26.9 V	36.9 V	22.1 W	115 lm/W	112 lm/W	99 lm/W	> 80	A+
STARK-CLE-130-2500-840-CLA	840/349	2,600 lm	2,480 lm	700 mA	26.9 V	36.9 V	22.1 W	115 lm/W	112 lm/W	99 lm/W	> 80	A+

① Tolerance range for optical and electrical data: ±10 %.

② Max. permissible repetitive peak current: 900 mA.

③ Max. permissible surge current: 1.2 A, duration max. 10 ms.

④ Integrated measurement over the whole module.

Standards

EN 62031
EN 62471
IEC 61000-4-2

Photometric code

Key for photometric code, e. g. 830 / 449

1 st digit	2 nd + 3 rd digit	4 th digit	5 th digit	6 th digit
Code	CRI			Lumen maintenance after 25% of the life-time (max.6000h)
7	67 – 76	McAdam initial	McAdam after 25% of the life-time (max. 6,000h)	Code
8	77 – 86			Remaining lumen
9	87 – ≥90			

Thermal design and heat sink

The rated life of LED products depends to a large extent on the temperature. If the permissible temperature limits are exceeded, the life of the CLE will be greatly reduced or the CLE may be destroyed.

tp point, ambient temperature and life-time

The temperature at tp reference point is crucial for the light output and life-time of a LED product.

For CLE a tp temperature of 65°C has to be complied in order to achieve an optimum between light output and life-time.

Compliance with the maximum permissible reference temperature at the tp point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

The tc and tp temperature of LED modules from Tridonic are measured at the same reference point.

Mounting instruction

None of the components of the CLE (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.

Max. torque for fixing: 0.5 Nm.

The LED modules are mounted with 3 screws per module. In order not to damage the modules only rounded head screws and an additional plastic flat washer should be used.



Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.

Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate.

Avoid corrosive atmosphere during usage and storage.

EOS/ESD safety guidelines

The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice. Please note the requirements set out in the document EOS / ESD guidelines (Guideline_EOS_ESD.pdf) at: <http://www.tridonic.com/esd-protection>

Heat sink values**CLE 120**

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25°C	65°C	700 mA	3.0 K/W	222 cm ²
35°C	65°C	700 mA	2.2 K/W	303 cm ²
45°C	65°C	700 mA	1.4 K/W	476 cm ²

CLE 130

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25°C	65°C	700 mA	2.4 K/W	278 cm ²
35°C	65°C	700 mA	1.7 K/W	392 cm ²
45°C	65°C	700 mA	1.1 K/W	606 cm ²

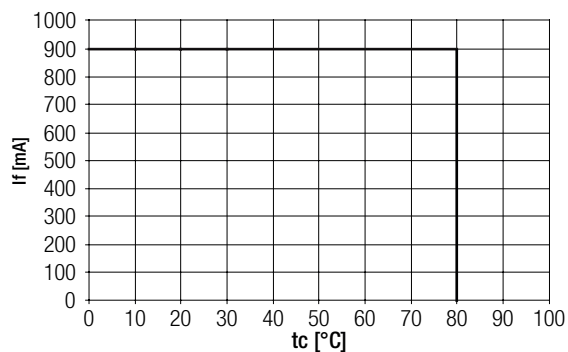
Notes

The actual cooling surface can differ because of the material, the structural shape, outside influences and the installation situation. Depending on the heat sink a heat conducting paste or heat conducting film might be necessary to keep the specified tp temperature.

Thermal behaviour

storage temperature	-30 ... +80 °C
operating temperature t_a	-25 ... +45 °C
t_p (at typ. current)	65 °C
t_c max. (at typ. current)	80 °C
max. humidity*	0 ... 70 %

* not condensed

**Life-time, lumen maintenance and failure rate**

The light output of an LED Module decreases over the life-time, this is characterized with the L value.

L70 means that the LED module will give 70 % of its initial luminous flux.

This value is always related to the number of operation hours and therefore defines the life-time of an LED module.

As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules.

The B value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value. In addition the percentage of failed modules (fatal failure) is characterized by the C value.

The F value is the combination of the B and C value. That means for F degradation and complete failures are considered, e.g. L70F10 means 10 % of the LED modules may fail or be below 70 % of the initial luminous flux.

Lumen maintenance for CLE 120

Forward current	t_p temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
700 mA	65 °C	9,000 h	19,000 h	17,000 h	38,000 h	26,000 h	50,000 h

Lumen maintenance for CLE 130

Forward current	t_p temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
700 mA	65 °C	9,000 h	20,000 h	18,000 h	40,000 h	28,000 h	50,000 h

Life-time declarations are informative and represent no warranty claim.

Selection of the LED Driver

CLE module can be operated either from SELV LED Drivers or from LED Drivers with LV output voltage.



CLE modules are basic isolated up to 190 V against ground and can be mounted directly on earthed metal parts of the luminaire. If the max. output voltage of the LED Driver (also against earth) is above 190 V, an additional isolation between LED module and heat sink is required (for example by isolated thermal pads) or by a suitable luminaire construction.

At voltages > 60 V an additional protection against direct touch (test finger) to the light emitting side of the module has to be guaranteed.

This is typically achieved by means of a non removable light distributor over the module.

Electrical supply/choice of LED Driver

CLE modules from Tridonic are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Safe and reliable operation can only be guaranteed in conjunction with a LED Driver which complies with the relevant standards. The use of LED Driver from Tridonic in combination with CLE modules guarantees the necessary protection for safe and reliable operation.

If a LED Driver other than Tridonic is used, it must provide the following protection:

- Short-circuit protection
- Overload protection
- Overtemperature protection




CLE modules must be supplied by a constant current LED Driver.

Operation with a constant voltage LED Driver will lead to an irreversible damage of the module.


Wrong polarity can damage the CLE.

With parallel wiring tolerance-related differences in output are possible (thermal stress of the module) and can cause differences in brightness. If one module fails, the remaining modules may be overloaded.

Wiring CLE 120



Wiring CLE 130


**Wiring type and cross section**

The wiring can be solid cable with a cross section of 0.4 to 0.75 mm².

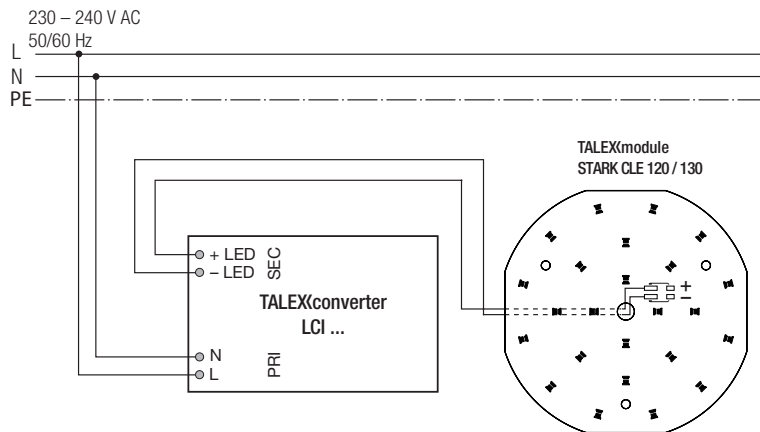
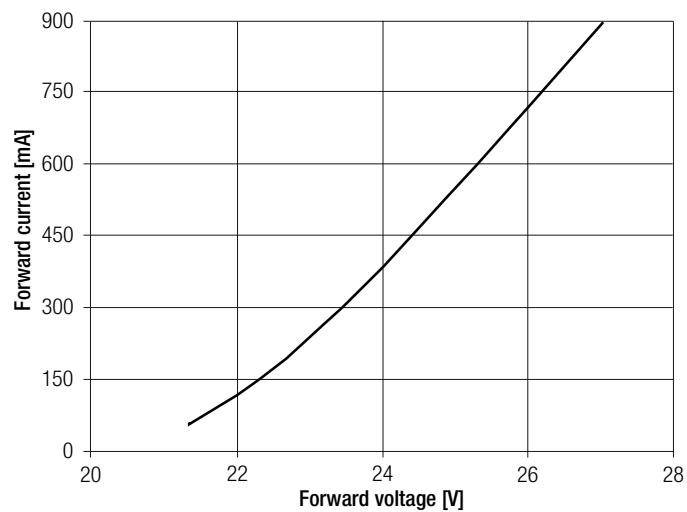
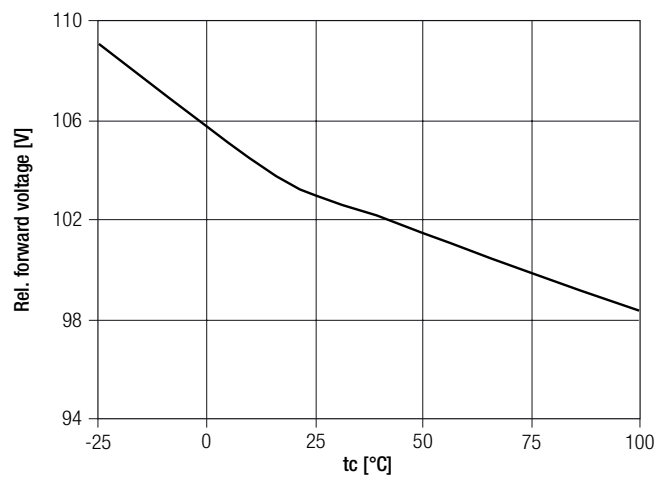
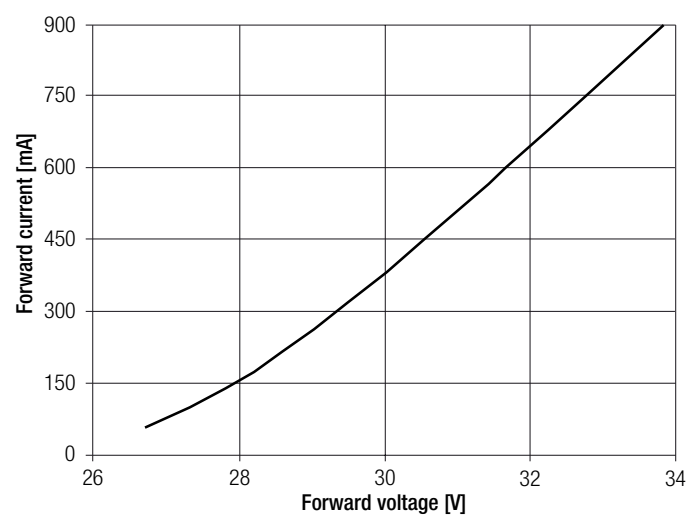
For the push-wire connection you have to strip the insulation (7–9 mm).

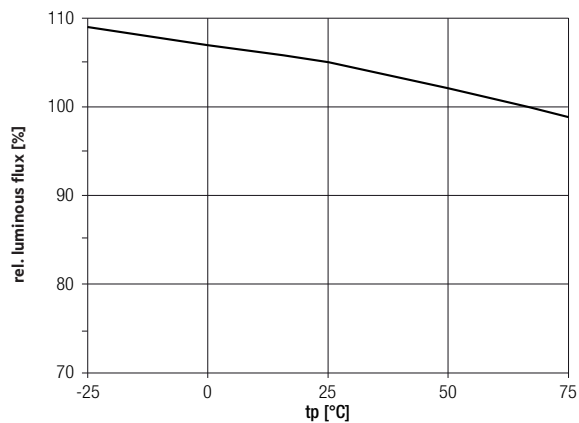
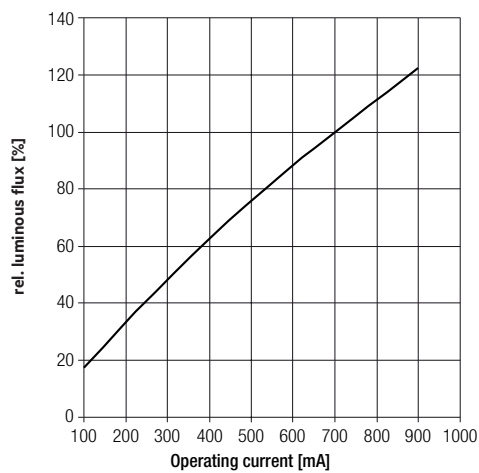
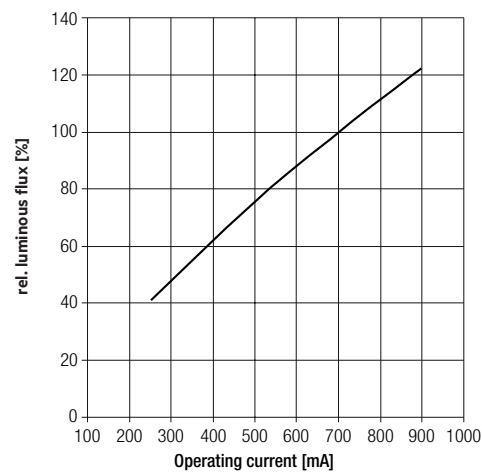
Loosen wire through twisting and pulling.

wire preparation:
0.4 – 0.75 mm²

**Release of the wiring**

Press down the “push button” and remove the cable from front.

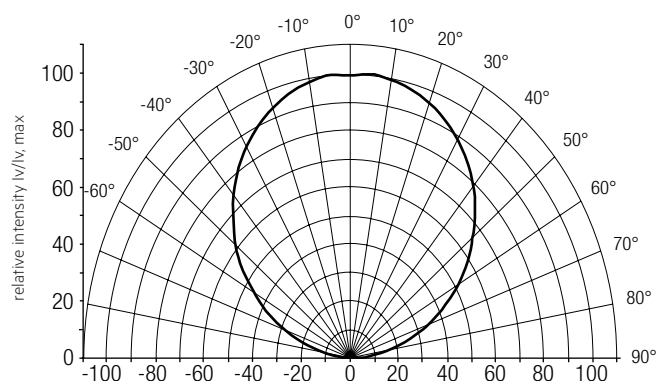
Wiring example**Forward current vs. forward voltage (CLE 120)****Forward current vs. forward voltage (CLE 130)**

Relative luminous flux**Relative luminous flux vs. operating current (CLE 120)****Relative luminous flux vs. operating current (CLE 130)**

The diagrams based on statistic values.
The real values can be different.

Optical characteristics CLE

The optical design of the CLE product line ensures optimum homogeneity for the light distribution.

Light distribution

The colour temperature is measured over the complete module. The single LED light points can be outside of 3SDCM. To ensure an ideal mixture of colours and a homogenous light distribution a suitable optic (e. g. PMMA diffuser) and a sufficient spacing between module and optic (typ. 5 cm) should be used.

3D-Data, photometric data and Design-in guide available on request or go to www.tridonic.com

Coordinates and tolerances according to CIE 1931

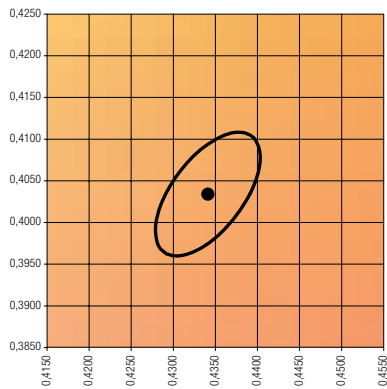
The specified colour coordinates are measured integral by a current impulse with typical values of module and a duration of 100 ms.

The ambient temperature of the measurement is $t_a = 25\text{ }^{\circ}\text{C}$.

The measurement tolerance of the colour coordinates are ± 0.01 .

3,000 K

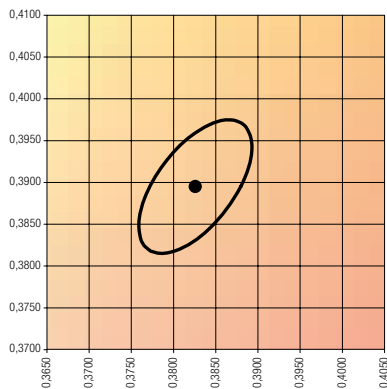
	x0	y0
Centre	0.4344	0.4032



— MacAdam Ellipse: 3SDCM

4,000 K

	x0	y0
Centre	0.3825	0.3796



— MacAdam Ellipse: 3SDCM

