



TRIDONIC

▼ enlightening your ideas

Technical Design-in Guide

TALEXEngine STARK QLE

Table of contents

Description	4
Complete system solution	4
Creative freedom	5
Warm and pleasant light	5
Outstanding cost effectiveness	5
Summary of the chapters	6
System overview	6
Mechanical aspects	6
Electrical aspects	6
Optical aspects	6
Thermal aspects	6
System overview	7
System versions	7
Converters	7
Operating functions	8
Type codes and versions	9
Versions	10
Converter matrix	11
Standards and directives	14
Mechanical aspects	17
Installation	17
Dimensional drawings	23
Electrical aspects	27
Electrical safety	27
Electrical safety and connection	28
Electrical connections	29
Connections on the LED control gear	30
Wiring diagrams	31
Optical aspects	34
Coordinates and tolerances	34
Beam characteristics	36
Thermal aspects	38
Cooling the modules	38
Ordering information and sources	40
Article numbers	40
Product application and partners	42
Partners	44
Tridonic sales organisation	48
Additional information	48

Description

A new era has dawned with TALEXX-LED. Now, high-quality light and optimum efficiency are no longer mutually exclusive. The versatile system solutions from Tridonic provide the basis for outstanding lighting designs that are future-proof, economical and eco-friendly in a wide range of applications.

LEDs come into their own in offices and educational institutions, in industry as well as technical working environments.

When designing LED lighting, there are certain differences compared to designs with conventional light sources. This design guide has been written to help you understand these differences. It answers all the most important questions you may have, such as on the right mechanical design, thermal management and optical conditions.

Complete system solution

LEDs offer major advantages in terms of general lighting: They are versatile, highly energy efficient and virtually maintenance free. With TALEXXengine STARK QLE you get a complete system solution from a single source comprising perfectly harmonised components: TALEXXmodule STARK QLE and TALEXXconverter.

The TALEXXengine STARK QLE offers impressive advantages:

- ▶ LED system solution with outstanding system efficiency of up to 101 lm/W consisting of a linear LED module and LED control gear
- ▶ Small colour tolerances of up to MacAdam 4
- ▶ Luminous flux of 1,250 lumen per LED module (hot lumen measurement at 65°C for technical specification under real conditions)
- ▶ High colour rendering (CRI >80)
- ▶ Colour temperatures of 3,000 K, 4,000 K and 5,000 K
- ▶ Option of combining multiple products, also with TALEXXengine STARK LLE
- ▶ Integrated emergency lighting function in combination with TALEXXmodule STARK QLE EM
- ▶ Emergency lighting compatible LED control gear in dimmable and non-dimmable versions
- ▶ Long lamp life of up to 50,000 hours
- ▶ Compliance with the mechanical and electrical standards of the luminaire industry

NOTICE

All information in this guide has been produced with the utmost care. However, the guide is subject to change without notice. Errors and omission excepted. Tridonic does not accept liability for possible damage resulting from the use of this guide. The latest version of this guide can be found at led.tridonic.com or from your sales partner.

Creative freedom

The square design with side lengths of 270 mm forms an ideal basis for fitting linear luminaires or square luminaires in compliance with the requirements of the particular application. The TALEXXengine STARK QLE can also be ideally combined here with the TALEXXengine STARK LLE linear LED module. Up to six LED modules can be operated with just one LED control gear. This makes it extremely to realise new design ideas.

The LED modules can be quickly wired up thanks to the push-in terminals.

This makes it extremely easy to both integrate efficient LED technology into existing luminaire designs or also realise new design ideas - irrespective of the optics as the TALEXXengine STARK QLE is suitable for all systems, from louvre to diffuser lights.

Warm and pleasant light

With excellent colour rendering and a choice of warm and neutral white colour temperatures, the LED system solution is a high-quality replacement for T5 and T8 fluorescent lamps - the result is pleasant and feel-good lighting.

Outstanding cost effectiveness

Compared to light installations with conventional lamps, TALEXX-LED reduces energy consumption by up to 40 percent. Its long service life means significantly lower maintenance and repair costs.

Experience a new world of lighting with TALEXX-LED!

Summary of the chapters

To make it easier to find your way around the Design-in Guide, we have grouped the information on the TALEXXengine STARK QLE system into chapters: The guide begins with a system overview in which the different versions of the system are presented. The mechanical, electronic, optical and thermal aspects of the components are then described. At the end of the Design-in Guide, you will find ordering information and sources.

System overview

The TALEXXengine STARK QLE system is available in the CLASSIC version. The relevant components can be clearly assigned by their type codes.

Mechanical aspects

Depending on the particular situation, the LED control gear can be installed in the luminaire casing (inbuilt) or outside the casing (remote).

Dimensional drawings and installation instructions will help you to take account of the requirements of the particular situation.

Electrical aspects

The TALEXXmodule STARK QLE can be combined with a variety of LED control gear.

Electrical safety aspects, connection options, the connection between the LED control gear and the power supply and the connections are described and shown in the relevant wiring diagrams.

Optical aspects

The overall efficiency of the system is improved by choosing a reflector with suitable optical properties (e.g. beam angle) and dimensions. This chapter provides information on beam characteristics and illumination strength.

Thermal aspects

The modules of the TALEXXengine STARK QLE system are designed for operation without a heat sink. Information on life of the modules and temperature measurement is summarised in this section.

Ordering information and sources

Information on ordering heat sinks as well as where heat sinks, reflectors and accessories can be sourced can be found at the end of this document.

System overview

System versions

The TALEXXengine STARK QLE system is available in the CLASSIC and EM CLASSIC versions

Properties and functions	TALEXXengine STARK QLE CLASSIC	TALEXXengine STARK QLE CLASSIC EM
Colour temperature	5,000K, 4,000 K or 3,000 K	4,000 K or 3,000 K
Luminous flux	1,310 lm, 1,250 lm oder 1,190 lm	1,250 lm or 1,190 lm
Colour rendering / colour tolerance	CRI > 80 / MacAdam 4 SDCM	CRI > 80 / MacAdam 4 SDCM
System efficiency ¹	101 lm/W	98 lm/W
DALI ²	Device Type 6 for LED control gear with dimming function	Device Type 6 for LED control gear with dimming function
DSI ²	yes	yes
switchDIM ²	yes	yes
corridorFUNCTION ²	yes	yes
Emergency light function ³	no	yes

¹ in combination with TALEXXconverter LCAI 080/0350 with a colour temperature of 5,000 K

² in combination with TALEXXconverter LCAI

³ in combination with EM PowerLED 2-4 W

Converters

Components

A uniform naming concept has been adopted for the components. The TALEXXengine STARK QLE system (quadratic LED Engine) comprises the following components:

- ▶ TALEXXmodule STARK QLE CLASSIC
- ▶ TALEXXconverter Suitable LED control gear with various functions are available for operation of the modules.
- ▶ The EM Power LED 2-4 W can be used for operation of a decentralised emergency light function. A TALEXXmodule is then operated with minimal luminous flux.

i NOTICE

Information on components for emergency light functions can be found on the Tridonic homepage www.tridonic.com and the respective product pages.

Efficiency of the modules

The high efficiency of the TALEXXmodule STARK QLE results not only in energy savings but also in a reduction in the thermal load. This means that more compact luminaires can be designed.

Area of application

- ▶ The components of the TALEXXengine STARK QLE system are suitable for indoor applications.
- ▶ TALEXXengine STARK QLE is mostly used in protection class I luminaires.

Operating functions

DALI

DALI functionality enables the modules to be digitally controlled via the DALI signal (16-bit Manchester Code). The possible functions depend on the controller used.

The minimum and maximum dimming levels can be programmed.

The control input is protected against polarity reversal and accidental connection to mains voltage up to 264 V AC.

The control line must be installed in accordance with the relevant directives on low voltage.

DSI

The DSI interface (Digital Serial Interface) allows luminaires to be controlled via a separate line, irrespective of the power supply cabling. If the room layout is changed, only the control line needs to be rerouted, the load line can be left unchanged. Switching on and off is controlled via the digital interface.

The low-voltage cable of the digital interface is polarity-free and can therefore be connected with either polarity to the DSI connection of the LED control gear.

TALEXXconverters with integrated DSI function are able to specify a minimum dimming value, maximum brightness and an emergency lighting value for all the connected operating devices in a control circuit. Using a digital interface ensures a consistent lighting level from the first to the last luminaire.

However, in contrast to DALI, the individual luminaires cannot be addressed separately.

switchDIM

The integrated switchDIM function enables a standard switch for dimming and switching to be connected directly. Pressing briefly on the switch (< 0.6 s) switches the LED control gear on or off. The last dimming value set will be recalled when the LED control gear is switched on.

Pressing the button for an extended period (> 0.6 s) serves to dim the connected module. The dimming direction (up/down) is changed when the switch is operated again.

Hold down the switch for about 10 seconds to synchronise all the connected devices to a dimming value of 50%. This prevents the LED control gear from starting at different dimming values or operating in the opposite dimming direction (e.g. with retrofit installations).

CAUTION!

Switches with glow lamps affect the switchDIM function and should therefore not be used for this purpose.

corridorFUNCTION

TALEXconverters one4all together with commercially available motion detectors enable the corridorFUNCTION: Presence-controlled lighting systems can be programmed without an additional controller so that the light is not switched off when no one is present and, instead, dimmed to a minimal level - and possibly only switched off completely after a preset period of time.

Type codes and versions

Type code for modules

The following type code is used to unambiguously identify the modules:

Type code for modules using STARK-QLE-270-1250-830-CLA-EM as an example

Designation	STARK	QLE	270	1250	8	30	CLA	EM
Meaning	Product	Form	Width	Luminous flux in lm	Ra > 80	Colour temperature 3,000 K	Version	Feature

Type code for LED control gear

The following type code is used to unambiguously identify the LED control gear:

Type code for LED control gear using LCI 080/0350 ...as an example

Designation	LCI	080	/	0350
Meaning	LED control gear, constant current non-dimmable	Power in W		Current in mA

Type code for LED control gear using LCAI 080/0350 ...as an example

Designation	LCAI	080	/	0350
Meaning	LED control gear, constant current dimmable	Power in W		Current in mA

The precise type designation for the LED control gear is given on the type plate of the LED control gear.

NOTICE

Please note the system combinations with the matching components on the following pages.
Ordering information on the components can be found at the end of this document.

Versions

TALEXEngine STARK QLE CLASSIC

The TALEXEngine STARK QLE CLASSIC system is an attractive entrylevel solution for general LED illumination. Depending on the application TALEXconverters with and without a dimming function are available.

Characteristics

- ▶ Colour temperature 3,000 K, 4,000 K or 5,000 K
- ▶ Colour rendering index CRI > 80
- ▶ Lumen values: 1,190 lm at 3,000 K, 1,250 lm at 4,000 K and 1,310 lm at 5,000 K
- ▶ Low MacAdam 4 SDCM colour tolerance
- ▶ System efficiency of up to 101 lm/W with high energy savings and short payback time

Control functions

- ▶ ON/OFF via network with LED control gear without dimming function
- ▶ DALI, DSI, corridorFUNCTION and switchDIM with LED control gear with dimming function

Converter matrix

Possible combinations for serial wiring

TALEXconverter in-built with dimming function

Converter	LCAI 080/350 one4all
Art. No.	86459392
Protection class	NON SELV
STARK-QLE-1250-830-CLA ¹	4-6
STARK-QLE-1250-840-CLA ¹	4-6
STARK-QLE-1250-850-CLA ¹	4-6

¹ Number of modules (min. - max.)

TALEXconverter in-built without dimming function

Converter	LCI 080/350 IO10	LCCI 016/035 Q010
Art. No.	86459366	86459213
Protection class	NON SELV	SELV
STARK-QLE-1250-830-CLA ¹	4-6	1
STARK-QLE-1250-840-CLA ¹	4-6	1
STARK-QLE-1250-850-CLA ¹	4-6	1

¹ Number of modules (min. - max.)

TALEXconverter independent with dimming function

Converter	LCAI 015/0350 A020 one4all
Art. No.	86458899
Protection class	SELV
STARK-QLE-1250-830-CLA ¹	1
STARK-QLE-1250-840-CLA ¹	1
STARK-QLE-1250-850-CLA ¹	1

¹ Number of modules

TALEXconverter independent without dimming function

Converter	LCI 015/0350 E020
Art. No.	24166312
Protection class	SELV
STARK-QLE-1250-830-CLA ¹	1
STARK-QLE-1250-840-CLA ¹	1
STARK-QLE-1250-850-CLA ¹	1

¹ Number of modules

Advantages and disadvantages of serial wiring

- Advantage: Very efficient operation with a non-SELV LED control gear
- Disadvantage: Additional protection measure is required in the luminaire

Possible combinations for parallel wiring

TALEXconverter in-built without dimming function

Converter	LCI 050/1050 R010	LCI 055/1400 R010
Art. No.	86459216	86459217
Protection class	SELV	SELV
STARK-QLE-1250-830-CLA ¹	3	4
STARK-QLE-1250-840-CLA ¹	3	4
STARK-QLE-1250-850-CLA ¹	3	4

¹ Number of modules

TALEXconverter independent with dimming function

Converter	LCAI 030/0700 A120 one4all
Art. No.	86458900
Protection class	SELV
STARK-QLE-1250-830-CLA ¹	2
STARK-QLE-1250-840-CLA ¹	2
STARK-QLE-1250-850-CLA ¹	2

¹ Number of modules

TALEXconverter independent without dimming function

Converter	LCI 050/1050 T020	LCI 055/1400 T020	LCI 030/0700 E020
Art. No.	86459218	86459219	24166314
Protection class	SELV	SELV	SELV
STARK-QLE-1250-830-CLA ¹	3	4	2
STARK-QLE-1250-840-CLA ¹	3	4	2
STARK-QLE-1250-850-CLA ¹	3	4	2

¹ Number of modules

Advantages and disadvantages of parallel wiring

- ▶ Advantages: SELV level protection class Several modules can be operated in parallel with just one LED control gear
- ▶ Disadvantage: Possible reduction in service life (if a module fails or a cable breaks, the current of the other modules increases), tolerance-related differences in brightness as well as larger amount of cabling.

Standards and directives

Standards and directives for modules

The following standards and directives were taken into consideration in designing and manufacturing the modules:

CE

2006/95/EG	Low-voltage directive: Directive relating to electrical equipment for use within certain voltage limits
2004/108/EG	EMC ¹ directive: Directive relating to electromagnetic compatibility

¹ EMC: Electromagnetic compatibility

RoHS

2002/95/EC	RoHS-Directive ¹ : Directive on the restriction of the use of certain hazardous substances in electrical and electronic equipment
-------------------	--

¹ RoHS: Restriction of (the use of certain) hazardous substances

Safety

DIN IEC 62031:2008	Safety requirements for LED modules
EN 60598-1:2008 und A11:2009	General requirements and tests for luminaires
EN 60598-2-2:1996 und A1:1997	Luminaires - Part 2. Special requirements; Main section 2: Recessed luminaires
EN 62471:2008	Photo-biological safety of lamps and lamp systems

Safety and performance

EN 61347-1:2009	General and safety requirements
EN 61347-2-13:2007	Special requirements for dc and ac powered electronic operating equipment for LED modules
EN 62384:2007 IEC 62384 A1:2009	Operational requirements

Energy labelling

EU Regulation No: 874/2012	"Energy labelling of electrical lamps and luminaires"
----------------------------	---

Standards and directives for LED control gear

The following standards and directives were taken into consideration in designing and manufacturing the LED control gear:

EMI

EN 55015 2008	Limit values measurement methods for radio interference properties of electrical lighting equipment and similar electrical devices
EN 61000-3-2:2005 A1: 2008 und A2:2009	Limit values for harmonic currents (equipment input current < 16 A per conductor)
EN 61000-3-3:2005	Limit values for voltage fluctuations and flicker in low-voltage systems for equipment with an input current < 16 A per conductor that are not subject to any special connection conditions
EN 61547:2001	EMC ¹ requirements

¹ EMC: Electromagnetic compatibility

Safety

EN 50172 2005	Safety lighting systems
---------------	-------------------------

DALI

IEC 62386-101:2009	General requirements, system
IEC 62386-102:2009	General requirements, controller
IEC 62386-207:2009	Special requirements, controller; LED modules

Mechanical aspects

Installation

Installation details

NOTICE



EOS/ESD safety guidelines

The device/module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice.



Please note the requirements set out in the document EOS/ESD guidelines (Guideline_EOS_ESD.pdf) at:

www.tridonic.com/com/en/technical-docs.asp

Installation example with TALEXXconverter and serial wiring

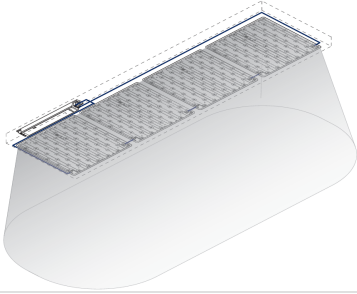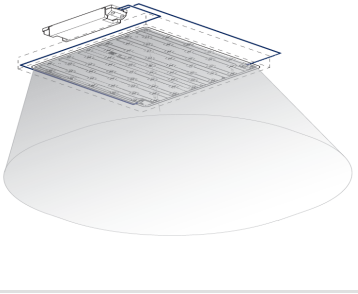


	
<p>Installation version IN-BUILT serial wiring with TALEXXconverter LCAI 80 W 350 mA one4all</p>	<p>Surface-mounting version REMOTE with serial wiring with TALEXXconverter LCI 15 W 350 mA</p>

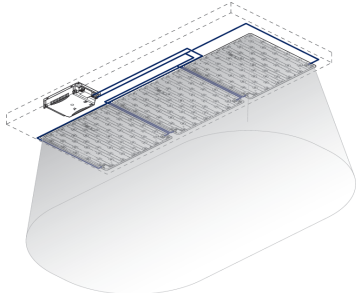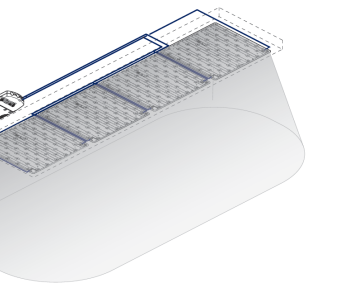Installation example with TALEXXconverter and parallel wiring

	
<p>Installation version IN-BUILT parallel wiring with TALEXXconverter LCI 50 W 1050 mA</p>	<p>Surface-mounting version REMOTE with parallel wiring with TALEXXconverter LCI 55 W 1400 mA</p>

Installation details

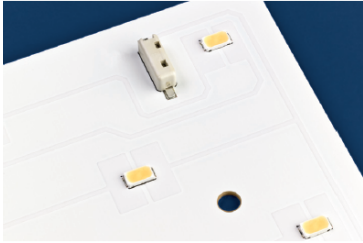Depending on the particular situation, the LED control gear can be installed in the luminaire casing (in-built) or outside the casing (remote).

		
<p>Clamping for quick and easy wiring</p>	<p>Homogeneous light even when several LED modules are used together</p>	<p>Unobtrusive wiring thanks to cable penetration and cable return</p>

Notes on installation

The following requirements must be met depending on the installation situation for the LED control gear and modules:

- ▶ Sufficient distance to active conducting materials
- ▶ Sufficient strain relief when the LED control gear cover is closed
- ▶ Sufficient cooling of the modules
(the max. temperature at the t_c point must not be exceeded)
- ▶ Unrestricted exit of light from the modules
- ▶ The module's spring terminals are designed for one-off wiring using solid conductors. The lines can be released by carefully unscrewing with solid conductors

NOTICE

Detailed information on the thermal connection and the position of the t_c point is given at "Thermal aspects".

Protection measures against damage

Mechanical stress

TALEXX modules contain electronic components that are sensitive to mechanical stress. Such stress should be kept to an absolute minimum. In particular the following mechanical stresses should be avoided as these may cause irreversible damage:


- ▶ Pressure
- ▶ Bending stress
- ▶ Drilling,
- ▶ Milling,

- ▶ Breaking,
- ▶ Sawing,
- ▶ and similar mechanical processing.

Compressive stresses

The components of the TALEXX modules (circuit boards, glob-top, lenses, electronic components etc.) are sensitive to compressive stresses. The components must not be exposed to compressive stresses.

- ▶ If glass or Plexiglas shields are used make sure that pressure is not exerted on the glob-top.
- ▶ Only touch the TALEXX modules at the edges

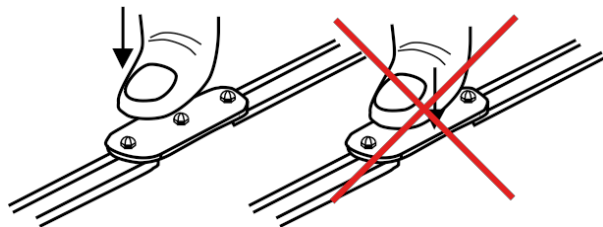

correct (left) and incorrect (right)

Bending stress

Bending the circuit board of a TALEXX module by more than 3 % along its length may damage the product and is therefore not permitted. 3 % corresponds for example to 6 mm for a 200 mm long module.



Max. bending stress for LED strip modules

Chemical compatibility

LED modules can be damaged by other materials, if these materials have certain chemical properties. The cause for these damages are different gaseous compounds, which penetrate into the encapsulant of the LED and thereby attack the encapsulant, the color conversion phosphor or the LED chips and can affect the electrical contacts or the substrate.

Application areas for chemical substances

The following are known areas in which chemical substances are used:

- ▶ use of protective coating in applications with high relative humidity (outdoor applications),
- ▶ encapsulation of LED modules,
- ▶ cementing of LED modules,
- ▶ sealing of luminaires.

The following materials must be checked for their safety:

- ▶ All components and auxiliaries used in the assembly of the luminaire:
 - » Solvents of adhesives and coatings

- » Other so-called VOC ("volatile organic compounds")
- All other additional substances present in the atmosphere:
 - » Outgassing of adhesives, sealants and coatings
 - » Cleaning agents and processing aids (e.g. cutting oils and drilling coolants)

i NOTICE

Contact your LED manufacturer for questions about the materials used and possible interactions and risks.

Putting together a "safe list" is not possible due to the complexity of the topic. The following table lists possible contaminants for LED modules, the classes of compounds and examples of possible sources. The list shows the most commonly used materials but does not claim to be complete.

Class of compounds	Chemical names	Occurs in
Acids	» hydrochloric acid » sulfuric acid » nitric acid » phosphoric acid	» cleaner » cutting oils
Organic acids	» acetic acid	» RTV silicones » cutting oils » degreaser » adhesives
Alkalies	» ammonia » amines » sodium hydroxide	» detergents » cleaner
Organic solvents	» ethers (e.g. glycol) » ketones (e.g. Methyl ethyl ketone) » aldehydes (e.g. formaldehyde) » aromatic hydrocarbons (e.g. xylene and toluene)	» cleaner » benzene » petroleum » paints and varnishes
VOC (volatile organic compounds)	» acetate » acrylates » aldehydes » resins	» super glue » all-purpose glue » screw locking varnish » coatings » paints and varnishes
Mineral oils	» hydrocarbons	» machine oil » lubricants
Vegetable oils and synthet. oils	» siloxanes » fatty acids	» silicone oils » linseed oil » fats

Harder,
vulcanizer

» sulfur compounds


» seals
» sealants
» colors

Protection measures for the glob top material

The following guidelines must be observed to avoid damage to the glob-top:

- ▶ Make sure that the chemicals used in LED applications are not solvent-based, condensation crosslinked or acetate crosslinked (acetic acid). These give rise to reagents (e.g. solvent vapors, acetic acid) that may damage LED modules or the encapsulant. This applies to chemicals that are used not in the immediate vicinity of the modules (e.g. seals) and also to chemicals that come into direct contact with the modules (e.g. insulating coatings, adhesives).
- ▶ To ascertain the chemicals used and the type of cross linking a technical data sheet containing a list of substances must be requested from the manufacturer.

Example of damaged encapsulant material, recognizable by the change of the chromaticity coordinates:

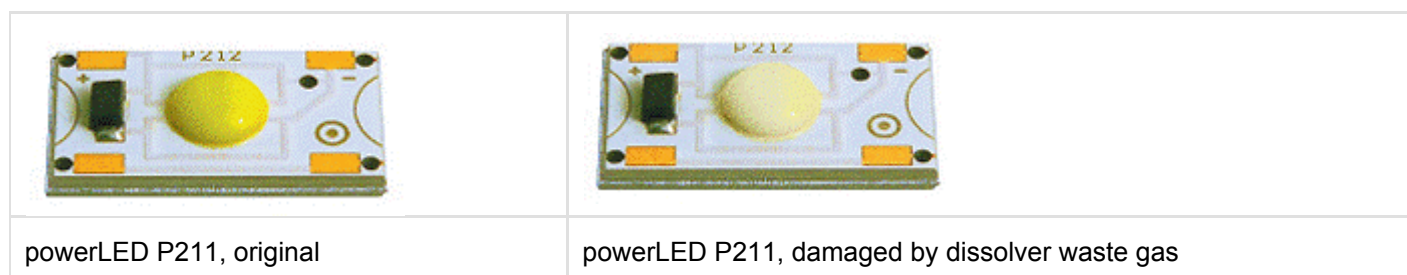

Protection measures in regards to sealing

The points above also apply to chemicals used for sealing luminaire casings. If however the LED module is not installed in the luminaire until after the sealing compound has been completely cured (see relevant material information) the above points can be ignored.

If the LED modules have already been installed in the luminaire, possible damage to the encapsulant can be reduced to a minimum by ensuring adequate spacing (>10 cm) and ventilation (open casing and air circulation, extraction / fan) during the curing process.

Protection measures in regards to cementing

To avoid damaging the LED modules you must not use any tools or exert any pressure on the electronic components or the encapsulant.

- ▶ If glass or Plexiglas shields are used make sure that pressure is not exerted on the encapsulant.
- ▶ Only touch the LED modules at the edges

Instructions for cementing TALEXX modules

Preparation

Clean and durable bonding of two materials requires special attention.
The following cleaning agents are recommended:

- ▶ Isopropanol / Water 50/50
- ▶ Acetone
- ▶ Heptane

Important aspects

- ▶ Carrier material
The carrier material must have adequate thermal conductivity (e.g. aluminium). The size of the cooling surface depends on the power of the LEDs, among other things. For information on the cooling surface required, see the appropriate product data sheet.
- ▶ Adhesive material
The carrier material itself plays an important role in selecting the adhesive material. The crucial factors are the coefficient of expansion and compatibility with the base material of the TALEXX module board (plastic or aluminium). This must be checked in the application in terms of long-term stability, surface contamination and mechanical properties.
- ▶ Surface quality
The carrier material must be uncoated (thermal transport, adhesion) and level at the connection points.
- ▶ Installation temperature
To achieve optimum adhesion we recommend you carry out this work at room temperature.
- ▶ Duration, optimum adhesive strengths
Maximum adhesion is achieved within 48 hours at room temperature; the process is accelerated by heat. In actual practice this means that at the maximum temperature (approx. 75-85 °C, product-specific) maximum adhesion is reached after about 12 hours. During the curing period make sure that there is no tensile load on the adhesive connection of the TALEXX module.

Additional information

TALEXX modules must not be stuck and restuck time and again without replacing the adhesive tape. Damaged adhesive tapes must be completely removed and replaced by new tapes.

Packaging and transport

TALEXX products from Tridonic are delivered in appropriate packaging. The packaging provides special protection against mechanical damage and ESD (electrostatic discharge). If you need to transport TALEXX products you should use this packaging.


Installation of the modules

The LED modules are mounted with 4 screws per module. In order not to damage the modules only rounded head screws and an additional plastic flat washer should be used.

Suitable screws should be selected on the basis of the following dimensions:


Dimensions of the fastening screws

Screw size	M4
Max. diameter D	7 mm
Min. length L	5 mm
Max. length L	depending on the design of the luminaire

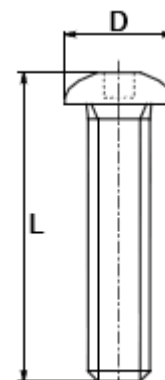


Dimensional drawings


Dimensional drawings of the TALEXXmodule STARK QLE CLASSIC

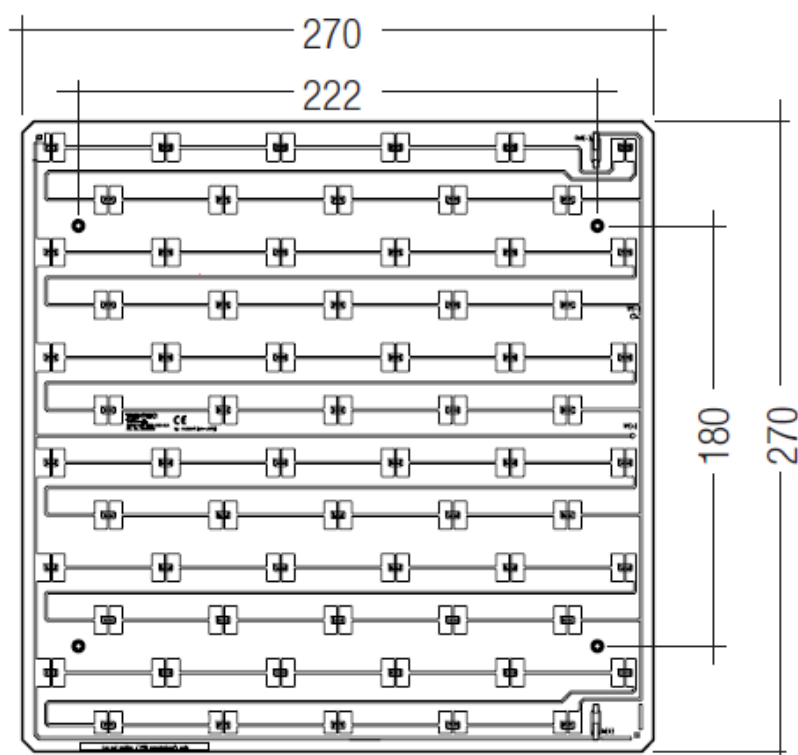


Dimensional drawing of the TALEXXconverter LCAI 080/0350 I010 one4all IN-BUILT

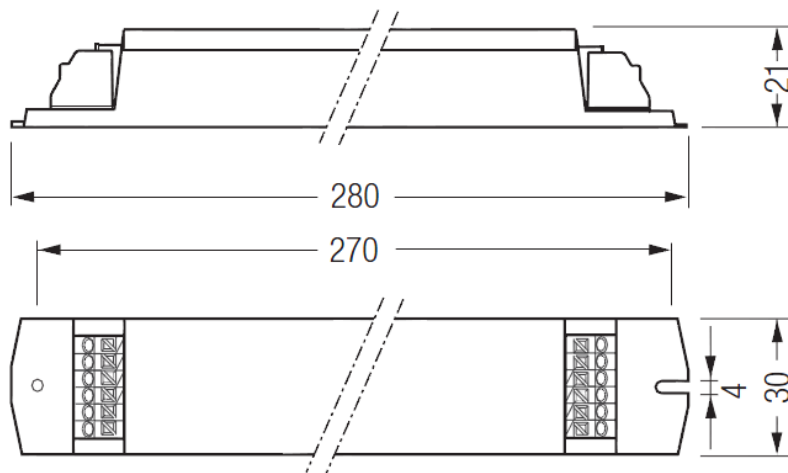

Dimensional drawing of the TALEXXconverter LCI 055/1400 R010 IN-BUILT

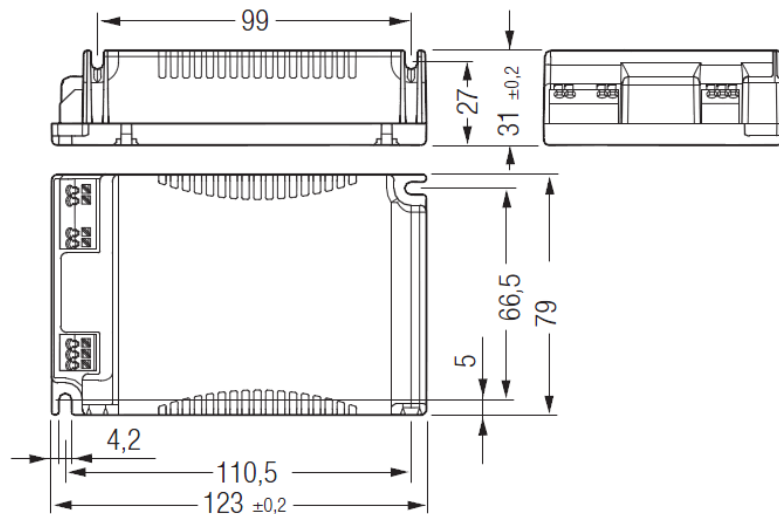

Dimensional drawing of the TALEXXconverter LCI 050/1050 T020 REMOTE

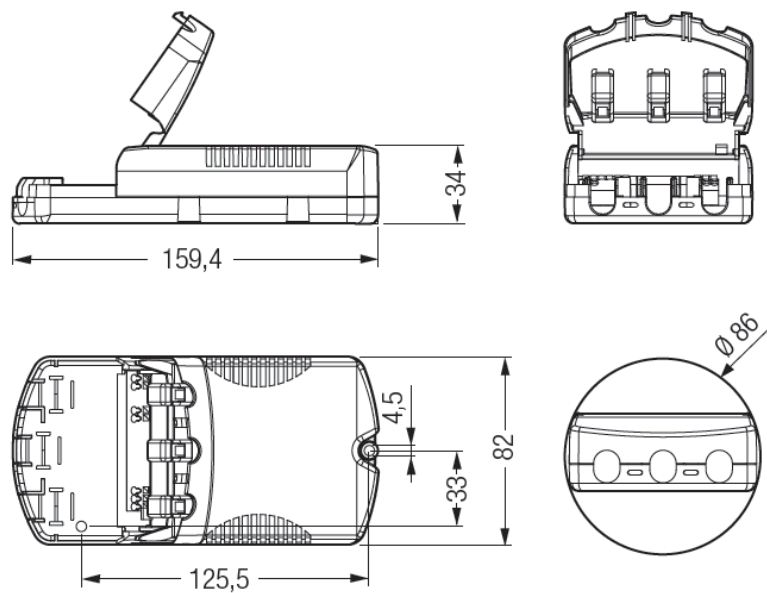

Dimensions of further TALEXXconverters

Type	L x W x H
LCAI 015/0350 A020 one4all	167 x 42 x 31 mm
LCAI 016/0350 Q010 one4all	103 x 67 x 31 mm
LCAI 030/0700 A120 one4all	207 x 42 x 31 mm
LCI 015/0350 E020	165 x 43 x 30 mm
LCI 080/0350 I010	280 x 30 x 21 mm
LCI 030/0700 E020	141 x 43 x 30 mm
LCI 050/1050 R010	123 x 79 x 31 mm
LCI 055/1400 T020	160 x 82 x 34 mm
LCCI 016/0350 Q010	103 x 67 x 31 mm
EM powerLED 2W	127 x 30 x 21 mm
EM powerLED 4W	127 x 30 x 21 mm

i NOTICE




CAD data on these and other LED control gear can be downloaded from the Tridonic homepage www.tridonic.com and the relevant product page.

Electrical aspects

Electrical safety

Basic classification of protection classes

Depending on the design of the luminaire, the requirements of different electrical protection classes are satisfied:

	Luminaires in protection class III (also SELV which stands for Safety Extra Low Voltage) have such low internal voltages that a shock current would be inconsequential. AC voltages with an effective value of up to 35 V AC and direct currents up to 60 V DC are referred to as low voltage (also extra-low voltage and weak current).
	Protection class II (non-SELV) applies for luminaires with double insulation, with no protective earth, between the mains circuit and the output voltage or metal casing. Even if the luminaires have electrically conductive surfaces, thanks to their insulation they are protected against contact with other live parts.
	Protection class I (non-SELV) applies for luminaires with basic insulation and protective earth. All the electrically conductive casing components are connected via a protective conductor system which is at earth potential.

Basic insulation of TALEXXmodule STARK QLE

The TALEXXmodul STARK QLE features basic insulation against earth, i.e., a clearance/creepage distance greater or the same as 3 mm and can be directly assembled on an earthed metal part of the luminaire, also in operation with the TALEXXconverter LCAI 80W 350mA.

Design measures for satisfying protection class requirements

Not all the components of the TALEXX STARK QLE system comply with the SELV standard. The voltages can thus be greater than 60 V DC.

Luminaire with SELV level

When using the LED module STARK QLE CLASSIC in combination with a TALEXXconverter in protection class SELV, the SELV level for the luminaire is achieved.

Thanks to SELV voltage, the luminaire can be replaced by an expert without risk.

NOTICE

Classification of the LED control gear in SELV and NON-SELV protection classes can be found in the LED control gear matrix.

Protection class II luminaires

When using a TALEXXconverter with NON-SELV level, the following measures are essential in order to achieve protection class II:

- ▶ Reinforced insulation between TALEXXmodule STARK QLE and the luminaire casing, e.g., by means of plastic casing or an additional insulating foil between the luminaire casing and the module.
- ▶ Reinforced insulation between the LED control gear and luminaire casing, e.g., by means of plastic casing
- ▶ Use of double-insulated lines
- ▶ Protect all electrical contacts against mechanical contact, this can typically be achieved with optics which cannot be removed

Protection class I luminaires

When using a TALEXXconverter with NON-SELV level, the following measures are essential in order to achieve protection class I:

- ▶ Use of metal casing for the luminaire
- ▶ Assembly of the TALEXXmodule STARK QLE directly on the casing
- ▶ Grounding of the LED control gear, TALEXXmodule STARK QLE and the luminaire itself
- ▶ Protect all electrical contacts against mechanical contact, this can typically be achieved with optics which cannot be removed

DANGER!

The following measures must be followed in order to avoid lifethreatening situations:

- ▶ Electrical work on a luminaire with protection class I or II (non-SELV) must only be carried out by an electrically skilled person.
- ▶ The luminaire must be disconnected from the mains before starting work on it.
- ▶ Check the luminaire for damage, if there are any signs of damage, the luminaire must be replaced.

Electrical safety and connection

Electrostatic safety and EMC protection

The LED modules are tested up to a voltage of 8 kV static discharging. Depending on the ambient conditions, appropriate precautionary measures must be taken in order to avoid higher voltages, for example during production or installation.

For good EMC conduct, the lines should be run separately from the mains connections and lines. The maximum secondary line length on the terminals is 2 metres.

Electrical supply and selection of the LED control gear

⚠ CAUTION!

TALEXXmodules STARK QLE are not protected against overvoltages, overcurrents, overloads and short-circuit currents!

Safe and reliable operation of the LED modules can only be guaranteed in conjunction with a LED control gear which complies with the relevant standards.

When using a TALEXXconverter, the following protection is offered:

- ▶ Short-circuit recognition
- ▶ Overload recognition
- ▶ Overtemperature switch-off

TALEXXmodules STARK QLE must be supplied by a constant current LED control gear. Operation with a constant voltage LED control gear leads to irreversible damage to the modules! Wrong polarity can damage the TALEXXmodules STARK QLE. If a wire breaks or a complete module fails in the case of parallel wiring, the current passing through the other modules increases. This may reduce the service life considerably.

Electrical connections

TALEXXmodule STARK QLE CLASSIC connections

The LED control gear is connected to the power supply and the connections of the control lines and the LED module via push-in and spring terminals:

Line cross-section and stripped length of the insulation on the LED module:




- ▶ Permissible line cross-section: 0.4 - 0.75 mm²
- ▶ Stripped length of the insulation 6 - 7 mm
- ▶ Push-in terminal for solid conductors

Push-in terminal for solid conductorsLine cross-section on the LED control gear with spring terminal:

- ▶ Permissible line cross-section: 0.5 - 1.5 mm²
- ▶ Stripped length of the insulation 8.5 - 9.5 mm
- ▶ Spring terminal for stranded wire with end splice or solid conductor


Spring terminal for stranded wire with end splice or solid conductor

Permissible line cross-sections and stripped insulation lengths of LED control gear with screw terminals can be found in the respective LED control gear data sheets.

		
LED module wire preparation	Converter wire preparation	Spring terminal on the LED control gear

Connections on the LED control gear


Connections on the LED control gear for TALEXXmodules STARK QLE CLASSIC

Pin/Connection	Connection on the TALEXXconverter	Design
	Protective earth or functional earth	Spring terminal
~	Power input	Spring terminal
~	Power input	Spring terminal
DA ¹	Control input DALI / DSI / switchDIM / corridor FUNCTION	Spring terminal
DA ¹	Control input DALI / DSI / switchDIM / corridor FUNCTION	Spring terminal
+LED	TALEXXmodules STARK QLE CLASSIC	Spring terminal
-LED	TALEXXmodules STARK QLE CLASSIC	Spring terminal

¹ only with LED control gear with the corresponding functionality


Wiring diagrams

Wiring diagram for TALEXXengine STARK QLE CLASSIC with serial wiring and switchDIM

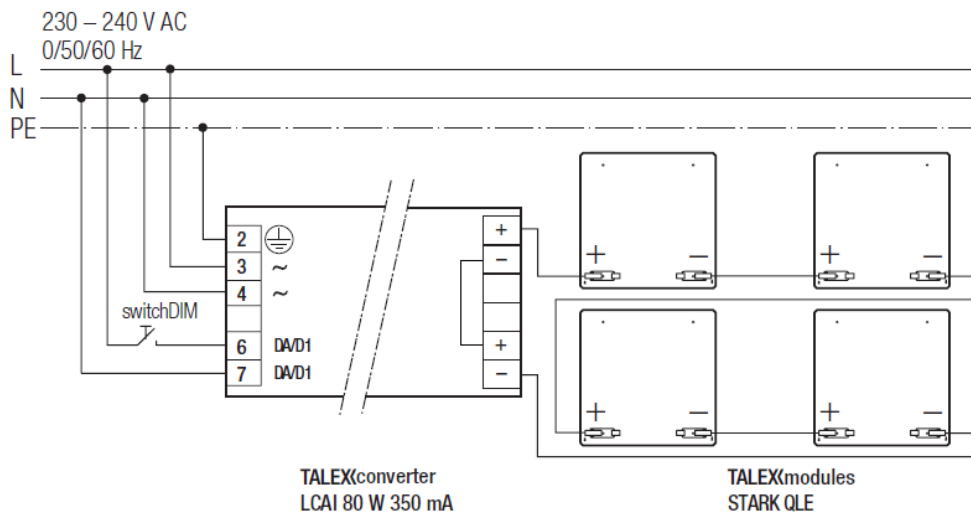


The wiring diagram shows serial wiring on a LED control gear with dimming function and 4 modules of type TALEXXmodule STARK QLE CLASSIC as well as connection of the LED control gear to the power supply and direct connection of a commercially available push to make switch.

Wiring diagram for TALEXXengine STARK QLE CLASSIC with serial wiring

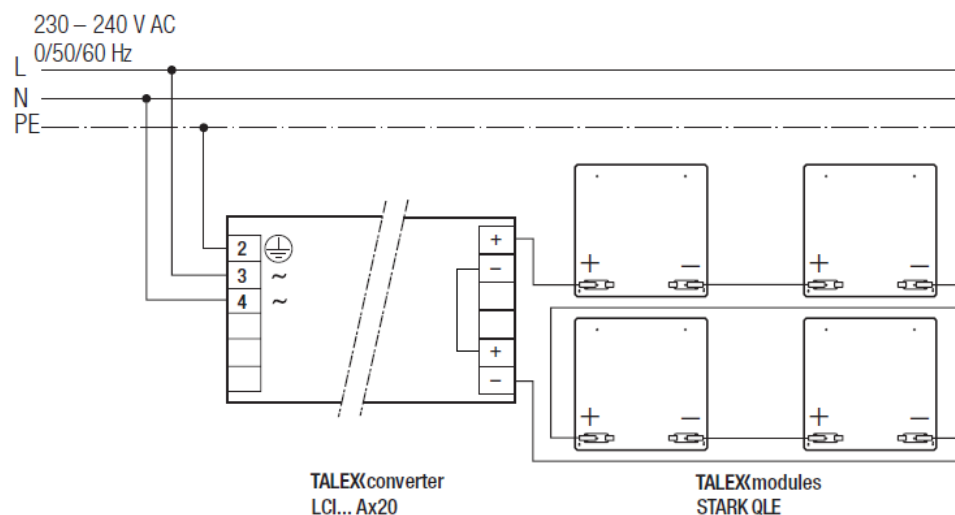


The wiring diagram shows serial wiring on a LED control gear with 4 modules of type TALEXXmodule STARK QLE CLASSIC as well as connection of the LED control gear to the power supply.

Wiring diagram for TALEXXengine STARK QLE CLASSIC with parallel wiring and switchDIM

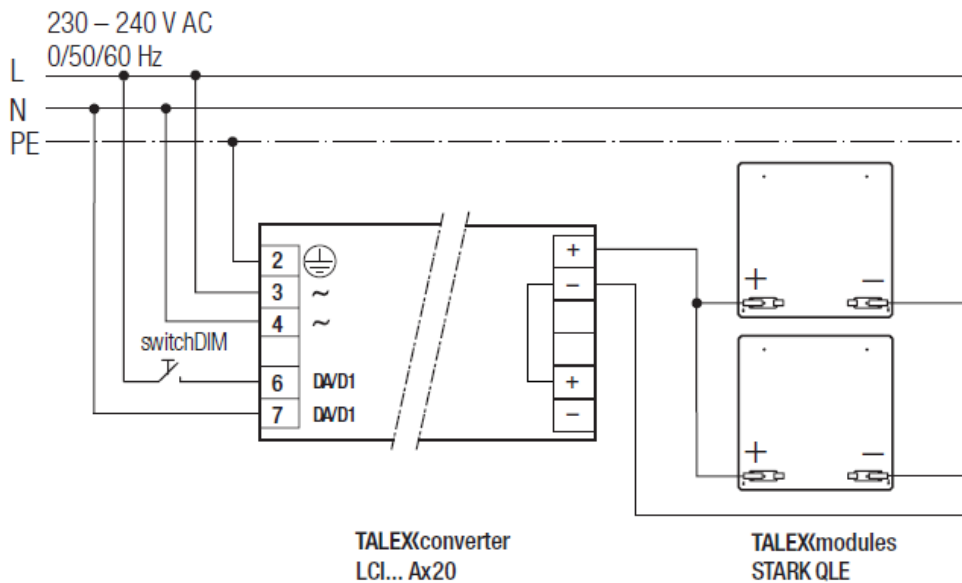

The wiring diagram shows parallel wiring between a LED control gear with dimming function and 2 modules of type TALEXXmodule STARK QLE CLASSIC as well as connection of the LED control gear to the power supply and direction connection of a commercially available push to make switch. With parallel wiring tolerance-related differences in brightness are possible. If one module fails, the remaining modules may be overloaded.

Wiring diagram for TALEXXengine STARK QLE CLASSIC with parallel wiring

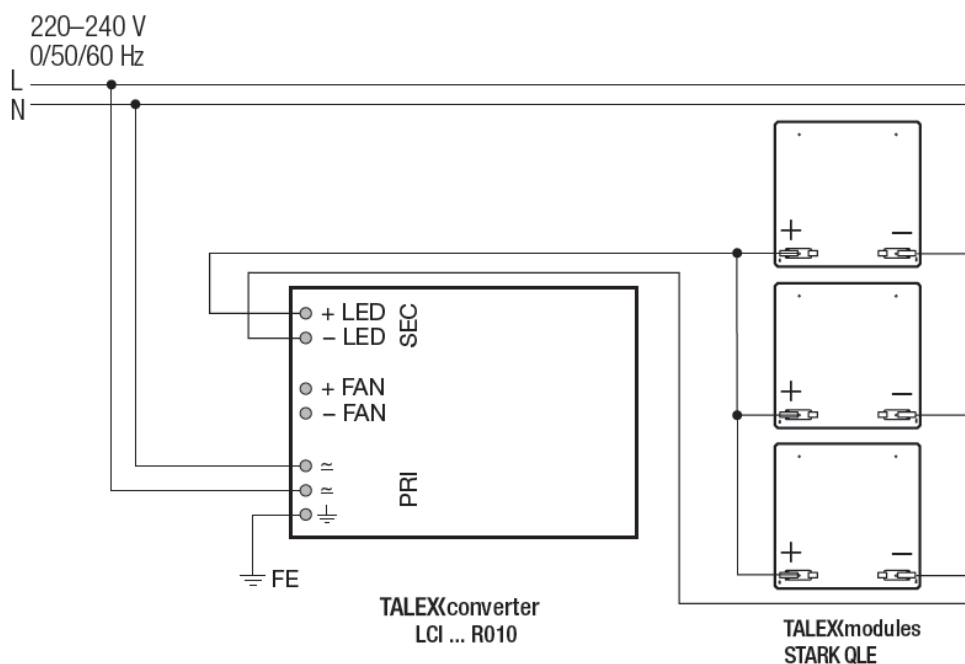


The wiring diagram shows parallel wiring between a LED control gear and 3 modules of type TALEXXmodule STARK QLE CLASSIC as well as connection of the LED control gear to the power supply.

NOTICE

With parallel wiring tolerance-related differences in brightness are possible. If one module fails, the remaining modules may be overloaded.

Wiring diagram for TALEXXengine STARK QLE CLASSIC and STARK QLE CLASSIC EM

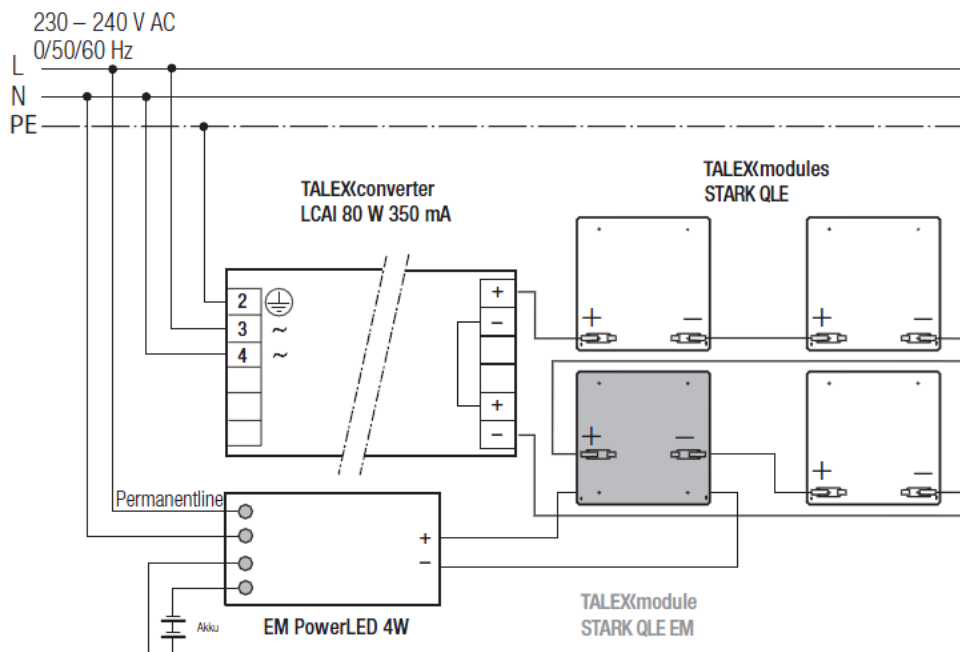

The wiring diagram shows connection between a LED control gear and 4 modules with serial wiring, of which 3 modules are of type TALEXXmodule STARK QLE CLASSIC and 1 of type TALEXXmodule STARK QLE EM CLASSIC with emergency light function. The emergency light module is additionally operated by an emergency light supply device.

Furthermore, connection of the LED control gear to the power supply / charger of the emergency light supply device is shown.


Optical aspects

Coordinates and tolerances

Light colours


The TALEXXengine STARK QLE CLASSIC is available in the colours 3,000 K, 4,000 K and 5,000 K.

MacAdam Ellipse: 4SDCM 3,000 K

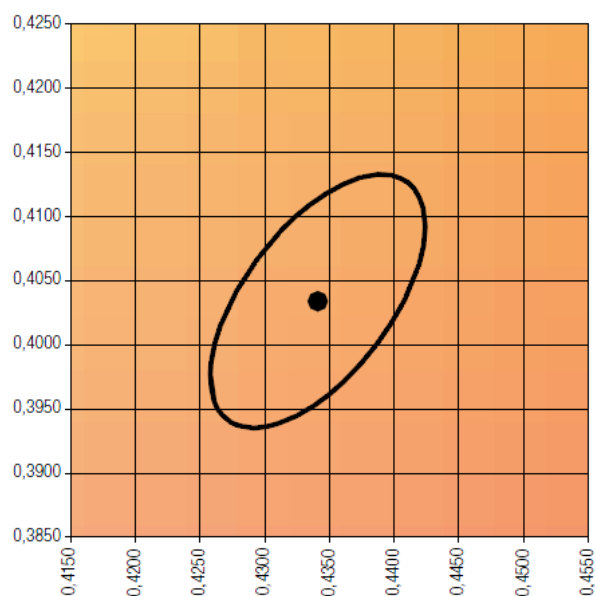


	x0	y0
Centre	0.4344	0.4032

MacAdam Ellipse: 4SDCM 4,000 K

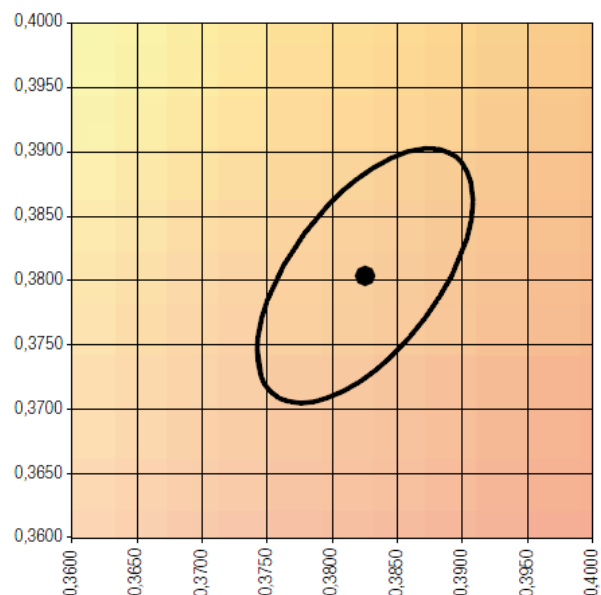

	x0	y0
Centre	0.3828	0.3803

MacAdam Ellipse: 4SDCM 5,000 K

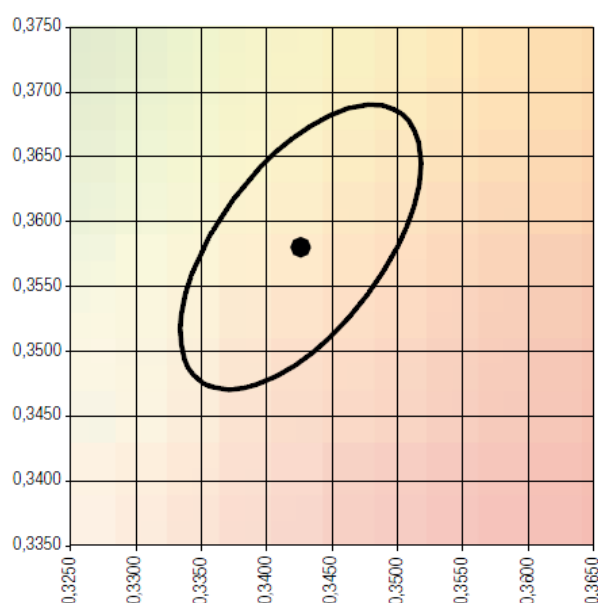

	x0	y0
Centre	0.3422	0.3558

Eye safety

Risk group	Evaluation
Actinic UV E_S (200 - 400 nm)	Risk group 0 ⁽¹⁾
Near UV E_{UVA} (315 - 400 nm)	Risk group 0 ⁽¹⁾
Blue light L_B (300 - 700 nm)	Risk group 0 ⁽¹⁾
Retina, thermal L_R (380 - 1,400 nm)	Risk group 0 ⁽¹⁾
IR radiation, eye E_{IR} (780 - 3,000 nm)	Risk group 0 ⁽¹⁾

⁽¹⁾ The evaluation of eye safety is based on EN 62471:2008 (photo-biological safety of lamps and lamp systems):

- ▶ Risk-free (risk group 0): The LEDs do not pose any photo-biological risk.
- ▶ Low risk (risk group 1): The LEDs pose a small risk because of normal limitations.
- ▶ Medium risk (risk group 2): The LEDs pose a small risk because of reactions to bright light sources or thermal discomfort.
- ▶ High risk (risk group 3): The LEDs pose a risk even with just momentary or temporary exposure.

Beam characteristics

Reflector and diffusers

With STARK QLE CLASSIC modules, the luminaire can be produced with either a diffuser or reflectors. There must be a minimum distance of 3 mm between the active parts and the conductive optical parts, e.g., reflector to the LED module.


CAUTION!

When using reflectors in combination with a non-SELV LED control gear, protection against contact must be ensured.

This is typically achieved with optics which cannot be removed over the module.

Beam characteristics of the TALEXXmodule STARK QLE

Maximum relative light intensity I_v/v

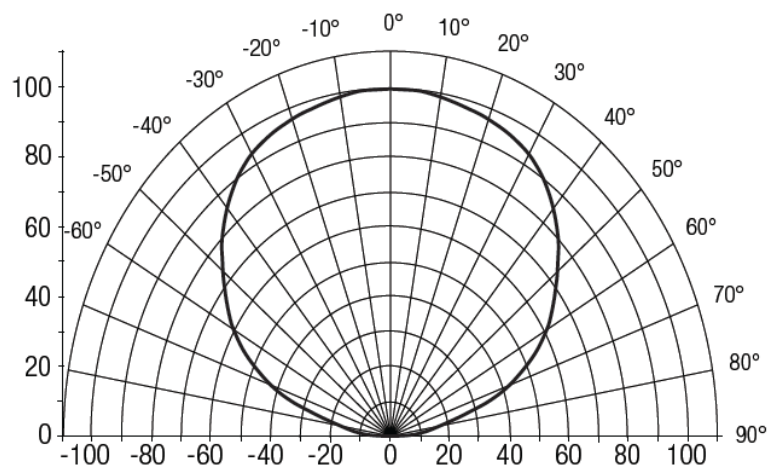

Average illuminance in relation to the lumen values of TALEXXmodule STARK QLE

Installation height	Diameter of the beam	1,190 lm 3,000 K	1,250 lm 4,000 K	1,310 lm 5,000 K
0.25 m	0.75 m	1.958 lux	2,056 lux	2,130 lux
0.5 m	1.50 m	489 lux	514 lux	535 lux
0.75 m	2.25 m	218 lux	2228 lux	238 lux
1.0 m	2.99 m	122 lux	129 lux	134 lux

Beam angle = 116° LOR = 100%

i NOTICE


To aid customised design and for optical simulation, Tridonic is happy to provide the modules' CAD data on request. Sources of reflectors can be found at "Partners".

Thermal aspects

Cooling the modules

Effect of cooling on the life of the modules

The modules of the TALEXXengine STARK QLE system are self-cooling and a heat sink is not required. The life of the module depends to a large extent on the operating temperature. The more that the operating temperature can be reduced, the longer the expected life of the module. If the permitted operating temperature is exceeded, however, the life of the module will be significantly reduced.

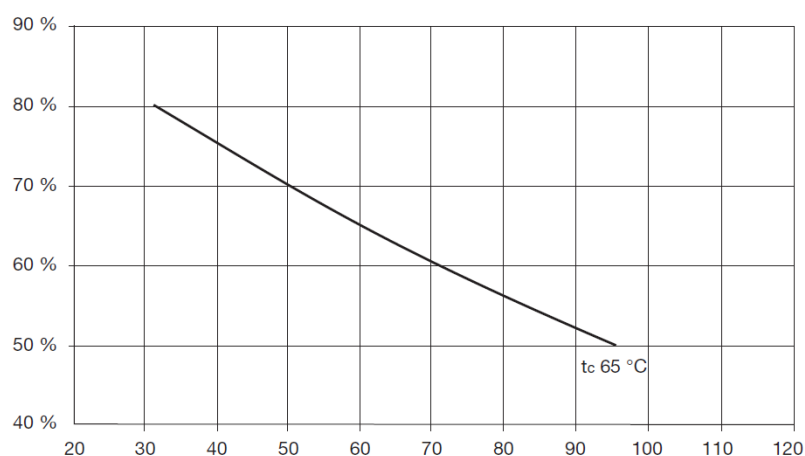

Fall in luminous flux over the course of the service life:

The diagram shows the change in luminous flux in percent over an operating time of 1,000 h at different t_c operating temperatures.

Luminous flux	Operating time at $t_c = 65\text{ °C}$
80 %	30,000 h
70 %	50,000 h
50 %	90,000 h

i NOTICE

Please check the information on the operating temperature and the requirements for cooling in the module data sheets.

Temperature measurement on the module


There is a t_c point on top of the module for checking the temperature of the latter:

The temperature at the t_c point can be measured with a simple temperature probe.

In practice, thermocouples (e.g. B&B Thermotechnik, K-type thermocouple) have proved successful. Such thermocouples can be attached directly to the t_c point with heat-resistant adhesive tape or a suitable adhesive. The measured values are recorded by an electronic thermometer (e.g., "FLUKE 51", VOLTcraft K202 data logger).

The maximum possible temperature must be determined under worst-case conditions (ambient temperature, installation of the luminaire) for the relevant application. Before the measurement is taken, the luminaire should be operated for at least 4 hours in a draught-free room.

The measurement must be taken in a steady thermal state and in a draughtfree room.

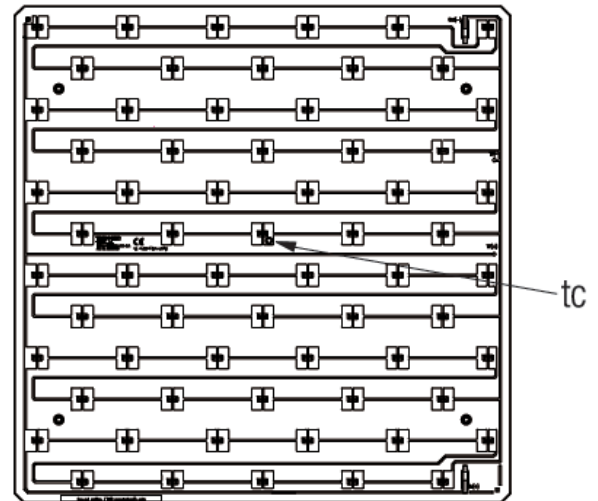

t_c point of the module

Temperature management of the LED control gear

Although the LED control gear have an integrated temperature management system, the requirements relating to cooling of the LED control gear must also be taken into account. Unintentional automatic dimming at overtemperature, for example, indicates inadequate cooling of the LED control gear.

The LED control gear temperature can be measured with a simple temperature probe at the t_c point. The t_c point of the LED control gear is indicated by a sticker on the casing.

i NOTICE

Measurement conditions, sensors and handling are described in detail in standard EN 60598-1 "General requirements and tests for luminaires".

Sources for suitable heat-conducting foil and paste for the thermal connection of a temperature probe can be found at "partners".

Ordering information and sources

Article numbers

TALEXEngine STARK QLE CLASSIC with 1,190 lm, 1,250 lm and 1,310 lm

Product name	Description	Article number
STARK QLE-1250-830-CLA	Module TALEXXmodule STARK QLE CLASSIC, colour temperature 3,000 K	25000717
STARK QLE-1250-840-CLA	Module TALEXXmodule STARK QLE CLASSIC, colour temperature 4,000 K	25000718
STARK QLE-1250-850-CLA	Module TALEXXmodule STARK QLE CLASSIC, colour temperature 5,000 K	25000820
LCAI 0080/350 I010 one4all	TALEXconverter, IN-BUILT, constant current, with dimming function	86459392
LCAI 015/0350 A020 one4all	TALEXconverter, REMOTE, constant current, with dimming function	86458899
LCAI 030/0700 A120 one4all	TALEXconverter, REMOTE, constant current, with dimming function	86458900
LCI 080/0350 I010	TALEXconverter, IN-BUILT, constant current, without dimming function	86459366
LCI 015/0350 E020	TALEXconverter, REMOTE, constant current, without dimming function	24166312
LCI 030/0700 E020	TALEXconverter, REMOTE, constant current, without dimming function	24166314
LCI 050/1050 R010	TALEXconverter, IN-BUILT, constant current, without dimming function	86459216
LCI 055/1400 R010	TALEXconverter, IN-BUILT, constant current, without dimming function	86459217
LCI 050/1050 T020	TALEXconverter, REMOTE, constant current, without dimming function	86459218
LCI 055/1400 T020	TALEXconverter, REMOTE, constant current, without dimming function	86459219
LCI 055/1400 R010	TALEXconverter, IN-BUILT, constant current, without dimming function	86459217

LCI 055/1400 T020	TALEX converter, IN-BUILT, constant current, without dimming function	86459219
LCCI 016/0350 Q010	TALEX converter, IN-BUILT, adjustable output current	86459213

TALEXEngine STARK QLE CLASSIC EM

Product name	Description	Article number
STARK QLE-1250-830-CLA-EM	Module TALEX module STARK QLE EM CLASSIC, colour temperature 3,000 K with emergency light function	25000816
STARK QLE-1250-840-CLA-EM	Module TALEX module STARK QLE EM CLASSIC, colour temperature 4,000 K with emergency light function	25000818
EM powerLED 2-4 W	Emergency light supply	div.

Suitable controllers

Tridonic offers a comprehensive range of DALI-compatible products. All the devices specified here support DALI Device Type 6 and therefore guarantee effective use of TALEXEngine STARK QLE.

Product name	Artikelnummer
DALI M-Sensor	86458265
DALI SC	24034263
DALI MC	86458507
DALI Touchpanel	24035465
x-touchBOX	24138954
x-touchPANEL	24138990
DALI PS	24033444
DALI USB	24138923

NOTICE

Go to led.tridonic.com for further emergency lighting products.

Product application and partners

Product application matrix

Whether you are looking for wide-area lighting or focused accent lighting, our wide range of TALEXX products will help you create an individual atmosphere and highlight specific areas exactly as you want. Our product portfolio includes individual light points, round, rectangular and strip versions. Specially matched operating equipment such as LED control gear, amplifiers and sequencers round off the components for a perfect system solution: They guarantee ideal operation and maximum efficiency.

TALEXEngine application

TALEXEngine	Spotlight	Downlight	Linear lumi- naires	Surface lumi- naires	Recessed floor and wall luminaires	Floor lumi- naires	Street lumi- naires	Decorative lumi- naires
TALEXEngine STARK DLE		✓						
TALEXEngine STARK DLE TWIST	✓	✓						
TALEXEngine STARK SLE	✓	✓			✓	✓		✓
TALEXEngine STARK LLE			✓	✓	✓	✓		
TALEXEngine STARK QLE				✓	✓			
TALEXEngine INDI			✓			✓		

TALEXXmodule application

TALEXXengine	Spotlight	Downlight	Linear luminaires	Surface luminaires	Recessed floor and wall luminaires	Floor luminaires	Street luminaires	Decorative luminaires
TALEXXmodule SPOT	✓	✓			✓	✓	✓	✓
TALEXXmodule RECTANGULAR	✓	✓			✓	✓	✓	
TALEXXmodule FULMEN	✓	✓						
TALEXXmodule STRIP								✓
TALEXXmodule EOS								✓
TALEXXmodule XED DECO		✓	✓	✓	✓			✓

TALEXXconverter application

TALEXXengine	Spotlight	Downlight	Linear luminaires	Surface luminaires	Recessed floor and wall luminaires	Floor luminaires	Street luminaires	Decorative luminaires
TALEXXconverter REMOTE dimmbar (LCA)		✓	✓	✓				✓
TALEXXconverter IN-BUILT dimmbar (LCA)	✓		✓	✓	✓	✓	✓	✓
TALEXXconverter REMOTE (LCI)		✓	✓	✓				✓
TALEXXconverter REMOTE (LCI)	✓		✓	✓	✓	✓	✓	✓

You will find further information on the technical data and the entire TALEXX product portfolio at led.tridonic.com

Partners

Heat sinks

Heat sinks with **active and passive cooling** to match the module can be obtained from the following manufacturers:

BRYTEC AG Brytec GmbH
Vierthalerstrasse 5
AT-5020 Salzburg
T +43 662 87 66 93
F +43 662 87 66 97
info@brytec.at

Cooliance GmbH
Im Ferning 54
76275 Ettlingen
Germany
Tel: +49 7243 33 29 734
Fax: +49 7243 33 29 735
info@cooliance.eu

MechaTronix
4 to 6F, No.308 Ba-De 1st Rd.,
Sinsin district, Kaohsiung City 80050,
Taiwan
Tel: +886-7-2382185
Fax: +886-7-2382187
sales@mechatronix-asia.com
www.mechatronix-asia.com

Nuventix
Vertrieb Österreich
EBV Distributor
Schonbrunner Straße 297-307
1120 Wien
T +43 1 89152-0
F +43 1 89152-30
www.ebv.com

SUNON European Headquarters
Sales area manager
Direct line: 0033 1 46 15 44 98
Fax: 0033 1 46 15 45 10
Mobile: 0033 6 24 07 50 49
andreas.rudel@sunoneurope.com

Heat sinks with **active cooling** can be obtained from the following manufacturers:

Francois JAEGLÉ
NUVENTIX EMEA Sales and Support Director
+33 624 73 4646
PARIS
fjaegle@nuventix.com

Heat sinks with **passive cooling** can be obtained from the following manufacturers:

AVC

Asia Vital Components Europa GmbH

Willicher Damm 127

D-41066 Mönchengladbach

T +49 2161 5662792

F +49 2161 5662799

sales@avc-europa.de

FrigoDynamics GmbH

Bahnhofstr. 16

D-85570 Markt-Schwaben

Germany

+49-8121-973730

+49-8121-973731

www.frigodynamics.com

Heat-conducting foil and paste

Heat-conducting **foil** (e.g. Transtherm® T2022-4, or Transtherm® Phase Change) for thermal connection between the module and a heat sink is available from the following partner:

BALKHAUSEN Division of Brady GmbH

Rudolf-Diesel-Straße 17

28857 Syke

Postfach 1253, 28846, Syke

T +49 4242 692 0

F +49 4242 692 30

angebot@balkhausen.de

Kunze Folien GmbH

Raiffeisenallee 12a

D-82041 Oberhaching

Tel: +49 89 66 66 82-0

Fax: +49 89 66 66 82-10

info@heatmanagement.com

3M Electro&Communications Business

4C, 3M House, 28 Great Jackson St

Manchester, M15 4PA

Office: +44 161 237 6182

Fax: +44 161 237 1105

www.3m.co.uk/electronics

Heat-conducting **paste** (e.g. Silicone Fluid Component) for thermal connection between the module and a heat sink is available from the following partner:

Shin-Etsu Chemical Co. Ltd.

6-1, Ohtemachi 2-chome

Chiyoda-ku

Tokyo 100-0004
Japan

LED housing

LED housing is available from the following partner:

A.A.G. STUCCHI s.r.l. u.s.
Via IV Novembre, 30/32
23854 Olginate LC
Italy
Tel: +39.0341.653.204
Mob: +39.335.611.44.85
www.aagstucchi.it

Reflector solutions and reflector design

Reflector solutions and support for reflector design are available from the following partners:

ALMECO S.p.A.
Via della Liberazione 15
Tel: +39 02 988963.1
Fax: +39 02 988963.99
info.it@almecogroup.com

Alux-Luxar GmbH & Co. KG
Schneiderstrasse 76
40764 Langenfeld
Germany
T +49 2173 279 0
sales@alux-luxar.de

Jordan Reflektoren GmbH & Co. KG
Schwelmerstrasse 161-171
42389 Wuppertal
Germany
T +49 202 60720
info@jordan-reflektoren.de

KHATOD
OPTOELECTRONIC
Via Monfalcone, 41
20092 Cinisello Balsamo (Milan)
ITALY
Tel: +39 02 660.136.95
Fax: +39 02 660.135.00
Christian Todaro

Mobile: +39 342 8593226

Skype: todaro_khatod

c.todaro@khatod.com

www.Khatod.com

LEDIL OY

Tehdaskatu 13

24100 Salo, Finland

F +35 8 2 7338001

Tridonic sales organisation

The complete list of the global Tridonic sales organisation can be found on the Tridonic homepage at [address list](#).

Additional information

Go to www.tridonic.com to find your personal contact at Tridonic.

Further information and ordering data:

- ▶ TALEXX catalogue at www.tridonic.com menu [Services](#) > [Literature](#) > [Catalogue](#)
- ▶ Data sheets at www.tridonic.com menu [Technical data](#) > [Data sheets](#)
- ▶ Certificates at www.tridonic.com menu [Technical data](#) > [Certificates](#)